

**PŘINÁŠÍME VÁM
NOVINKY**

D
DIGI**promo**



VYSTUPE Z DAVU A ZVIDITELNĚTE SE

DIGITAL SIGNAGE KATALOG 2023



ORIGINALITA V DIGITALIZACI

PRODEJ DIGITÁLNÍCH ZAŘÍZENÍ

INDOOR A OUTDOOR DIGITÁLNÍ LED POSTER



DIGIpromo

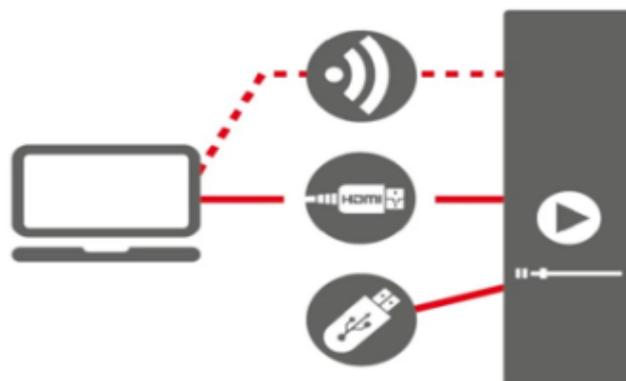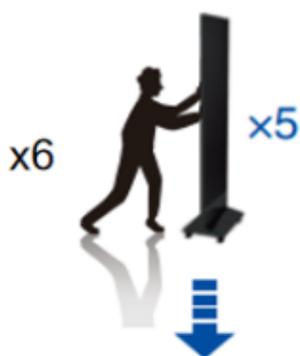

+ 4G Module SIM cart possible - CMS software free



P1.5 / P2 / P2.5 / P3 pixel pitch

Type	Parameter
Cabinet size	W640*H1920*30mm
Pixel Pitch(mm)	2.5mm
Pixel Density(dots/m ²)	160,000
Brightness(cd/m ²)	800-1000cd
LED Type	SMD 2020
Module Size	320*160mm
Module Resolution	128 dots*64 dots
Average Power Consumption(W/m ²)	210W
Max Power Consumption(W/m ²)	600W
Viewing Distance(m)	≧2m
Scan Mode	1/16 scan
Module weight KG/pc	0.9kg
Cabinet weight KG/m ²	42kg
LED Driving Mode	Constant current 2153
Module thickness	14.5mm
Maintenance	Front
Pixel	1R 1G 1B
Working Voltage(V)	4.5-5V
Grey scale	≥14bits
Color adjust	256 level
Frame Rate	60HZ
Refresh Rate	3840HZ
Ingress Rate	IP43
Control System	NOVA Star
Signal distance	CAT5≧130M Multi Mode Fiber≧500M Single Mode Fiber≧10KI
Constant using time	>72 Hours
Life Span	100,000 Hours
MTBF	>10,000 Hours
Working Temperature	-20°C~+50°C (Below -20°C can be customized)
Working Humidity	Outdoor 10~85%



Vlastnosti:

- Rozlišení displeje 1440x3840 px. se 4mm LCD obrazovkou z tvrzeného skla.
- Samostatně stojící verze s Android OS / Windows OS (volitelně), síťová verze.
- Možnost vertikální / horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Základní CMS (SW pro vzdálenou správu) zdarma.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.
- Možnost fotoaparátu / RFID modulu



4K UHD LCD POSTER

LCD Panel	Model	LW70DP	LW75DP
	Diagonal Size	70-inch	75-inch
	Resolution	1350 x 3840	1440 x 3840
	LCD Panel	Industrial LG LCD panel	
	Display Ratio	8:3	
	Brightness	500 cd/m ² /700 cd/m ²	
	Display Color	16.7M	
	Contrast Ratio	2000:1	
	View Angle	178° (H) /178° (V))	
	Response Time	≤8ms	
	Tempered Glass	4mm Tempered high transparency glass protection	
	Touch Frame (option)	10 Points IR Touch(60 million times at same position)	
	Working Hour	7 x 24 working hour	
	Panel Life	≥50000 hours	
Built-in Android Board	System Version	Android 7.1Version	
	Chipset	RK3288 Quad cores 64bit processor 1.8G frequency	
	ROM	16G EMMC	
Connectivity	RAM	2G DDR3	
	HDMI	1 x HDMI1.4	
	USB	2 x USB2.0	
	RJ45	1 x RJ45	
	TF Card Slot	Yes	
	USIM Card Slot	Yes	
Network	Built-In Louder Speaker	2 x 8Ω 5W Louder speaker	
	Ethernet	10M/100M Ethernet Adaptive	
	WIFI	Yes	
Digital Signage Software	Bluetooth	Yes	
	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.	
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format	
	Image Format	BMP/JPEG/PNG/GIF,etc,	
	File Format	PPT/Word/Excel/PDF	
	Flash	Support	
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play Scroll caption, weather time control, support live streaming, third party integration	
Remote Management Software	Cloud /local Digital Signage Software		
Other	Power Consumption	≤150W	
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)	
	Net Weight	43kg	
	Housing	Industrial Metal steel enclosure with black color or customized color	
	Working Temperature	-20 °C ~ 50 °C	
	Working Humidity	10%-90% (No-Condensing)	
	Storage Temperature	-40 °C ~ 60 °C	
	Storage Humidity	10% ~90%(No Condensing)	
Accessories	WIFI Antenna, Remote Controller, Power Cord		
	Installation Wrench & necessary screws		



Vlastnosti:




- Rozlišení displeje 1440x3840 px. se 4mm LCD obrazovkou z tvrzeného skla.
- Samostatně stojící verze s Android OS / Windows OS (volitelně), síťová verze.
- Možnost vertikální / horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Základní CMS (SW pro vzdálenou správu) zdarma.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.
- Možnost fotoaparátu / RFID modulu



4K LCD Poster - zrcadlové postavení

LCD Panel	Model	LW75FP
	Diagonal Size	75inch
	Resolution	1440 x 3840
	Pixel Pitch	0.4295 x 0.4295
	LCD Panel	Industrial LG LCD panel
	Resolution	1652 x 535
	Display Ratio	8:3
	Brightness	400 cd/m ²
	Display Color	16.7M
	Contrast Ratio	2000:1
	View Angle	178° (H) /178° (V))
	Response Time	≤8ms
	Tempered Glass	4mm Tempered high transparency glass protection
	Touch Frame	10 Points IR Touch/capacitive(60 million times at same position)
	Working Hour	7 x 24 working hour
	Panel Life	≥50000 hours
Built-in Android Board	System Version	Android 7.1Version
	Chipset	Quad cores 64bit processor 1.8G frequency
	ROM	16G EMMC
Connectivity	RAM	2G DDR3
	HDMI	1 x HDMI1.4
	USB	2 x USB2.0
	RJ45	1 x RJ45
	TF Card Slot	Yes
	USIM Card Slot	Yes
Network	Built-In Louder Speaker	2 x 8Ω 5W Louder speaker
	Ethernet	10M/100M/1000M Ethernet Adaptive
	WIFI	Yes
	Bluetooth	Yes
Digital Signage Software	Mobile Network	4G/3G Module
	Video Format	Wmv/avi/flv/rm/rmvp/mpeg /ts/mp4,etc.
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format
	Image Format	BMP/JPEG/PNG/GIF,etc,
	File Format	PPT/Word/Excel/PDF
	Flash	Support
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play Scroll caption, weather time control, support live streaming, third party integration
Other	Remote Management Software	Cloud /local Digital Signage Software
	Power Consumption	≤160W
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)
	Outline Dimension	1712mm(H) x 598mm(W) x 44.85 mm(T)
	Net Weight	57kg
	Housing	Foldable designIndustrial Metal steel enclosure with black color or customized color
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	10%-90% (No-Condensing)
	Storage Temperature	-40 °C ~ 60 °C
	Storage Humidity	10% ~90%(No Condensing)
	Accessories	WIFI Antenna, Remote Controller, Power Cord Installation Wrench & necessary screws



Vlastnosti:




- Full HD displej s tvrzeným sklem a super tenkým tělem kiosku 20 mm.
- Samostatně stojící verze s Android OS / Windows OS (volitelně), síťová verze.
- Možnost vertikální / horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Základní CMS (SW pro vzdálenou správu) zdarma.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.



Indoor ultratenký kiosek / panel

LCD Panel	Model	LW32SK	LW43SK	LW49SK	LW55DW	LW65DW	LW75DW
	Dimension	32"	43"	49"	55"	65"	75"
	Brightness	350 cd/m ² (Typical)					
	Brand	BOE/CSOT/LG					
	Color Gamut	16.7M					
	View Angle	178° (H) /178° (V))					
	Tempered Glass	tempered glass protection					
	Touch Screen	Multiple Points Capacitive/IR Touch					
	Panel Life	≥50000 hours					
Operation System (Option)	System	Windows/Android option					
Digital Signage Software(option)	Video Format	Wmv/avi/flv/rm/rmvp/mpeg /ts/mp4,etc.					
	Audio Format	MP3/WAV all audio format					
	Image Format	BMP/JPEG/PNG					
	Language	Multiple countries language interface					
	Multiple Play Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play					
	Remote Management	Cloud Digital Signage Software					
General	Network Interface	RJ45/IEEE802.31/100M ETHERNET LAN/WIFI					
	Port Interface	HDMI*1/USB*2/USIM Card Slot/TF card Slot					
	Audio	Left channel, right channel, 8Ω 5W speaker					
	Power Supply	AC220V to 110V(50-60HZ)					
	Housing	High-Grade Alloy mental housing , Aluminum Frame, Customized Color					
	Frame Color	Black/ white, other color customized					
	Working Temperature	-20 °C ~ 50 °C					
	Working Humidity	5%-90%					
	Storage Temperature	-40 °C ~ 60 °C					
	Storage Humidity	90%(No humidity)					
	Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable					

Specifications are subject to change without prior notice.



Vlastnosti:



- Konstrukce průmyslového stojanu s SGCC pozinkovanou ocelovou deskou s vnitřním povrchem
- Pozinkovaný práškem, vnější povrch Dupont Outdoor s životností více než 10 let.
- Modifikovaný design pro flexibilní a nepřetržitou údržbu.
- Vodotěsný, prachotěsný, proti slunečnímu záření, proti korozi, ultrafialový, proti krádeži, proti vlhkosti.
- Opatření proti hromu a ochrana proti elektrickému úniku.
- Full HD LCD panel s vysokým jasnem (2000Nit/2500Nit) a inteligentním nastavením jasu.
- Klimatizace (IP65) / chladič systém ventilátoru (IP55)
- Nárazuvzdorný napájecí zdroj vojenské kvality.
- Možnost operačního systému Windows / Android.
- Tvrzené sklo / 6 mm AR Antireflexní laminované tvrzené sklo s 97% propustností světla a odrazivost 3 %.
- Podpora vzhledu hardwaru a přizpůsobení modulu.



Outdoor LCD kiosek / panel

LCD Panel	Diagonal Size	32-inch	43-inch	49-inch	55-inch	65-inch	75-inch	86-inch	
	Display Area	698mm x 393mm	941mm x 529mm	1072mm x 602mm	1210mm x 681mm	1428mm x 803mm	1650mm x 928mm	1895mm x 1066mm	
	Resolution	1080*1920							
	Brightness	2000cd/m ² / 2500 cd/m ²							
	View Angle	H: 178°/V: 178°							
General	Outside Dimension	1800mm x 595mm x 170mm	1900mm x 690mm x 170mm	2000mm x 800mm x 180mm	2000mm x 840mm x 170mm	2250mm x 1005mm x 170mm	2250mm x 1130mm x 220mm	2450mm x 1270mm x 220mm	
	Working Temperature	-30°C ~ +55°C							
	Working Humidity	5%-90% RH							
	Professional Enclosure	Industrial Stand Case Design with SGCC Galvanized Steel Plate with Internal Surface Zinc Powder and External Surface with Dupont Outdoor Plastic Powder							
		Waterproof, Dustproof, Anti-sunshine, Anti-corrosion, Ultraviolet Resistance, Anti- theft, Anti-Moisture							
		Black color / white color / customized color							
	Test System	Spray water-proof testing, Temperature Environmental testing, Solar Radiation testing, pre-delivery aging test							
	Electronic Control System	Leakage-proof and Over-voltage protection							
Shockproof(C grade Shockproof preventing instant lightning strike)									
Military quality power supply(Stable and reliable)									
Option	Operating System	Windows / Android Operating System							
	Touchable Screen	Nano Touch/ Capacitive Touch							
	Smart Temperature System	Air condition / cooling fan + industrial heating module							



Vlastnosti:



- Full HD displej s tvrzeným sklem a kovovým krytem z vysoce kvalitní slitiny.
- Samostatná verze, Síťová verze (možnost Windows / Android)
- Možnost vertikální/horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.



Indoor LCD obrazovka na stěnu

LCD Panel	Model	LW22DW	LW32DW	LW43DW	LW49DW	LW55DW	LW65DW	LW75DW	LW85DW
	Dimension	22inch	32inch	43inch	49inch	55inch	65inch	75inch	85inch
	Resolution	1920 x 1080 / 3840 x 2160							
	Brightness	350 cd/m ² (Typical) / 500cd/m ² / 700 cd/m ²							
	Color Gamut	16.7M							
	View Angle	178° (H) /178° (V))							
	Touch Screen Type	10 points IR touch / 10 points capacitive touch option							
	Tempered Glass	tempered glass protection							
	Panel Life	≥50000 hours							
Operation System (Option)	System	Windows/Android option							
Digital Signage Software(option)	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.							
	Audio Format	MP3/WAV all audio format							
	Image Format	BMP/JPEG/PNG							
	Language	Multiple countries language interface							
	Multiple Play Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play							
	Remote Management	Local /Cloud Digital Signage Software							
General	Network Interface	RJ45/IEEE802.31/100M ETHERNET LAN/WIFI							
	Audio	Left channel, right channel, 8Ω 5W speaker							
	Power Supply	AC240V to 110V(50-60HZ)							
	Housing	High-Grade Alloy mental housing , Aluminum Frame, Customized Color							
	Frame Color	Black/ white, other color customized							
	Working Temperature	-20 °C ~ 50 °C							
	Working Humidity	10%-90%							
	Storage Temperature	-40 °C ~ 60 °C							
	Storage Humidity	90%(No humidity)							
	Accessories	Wall mount ,WIFI Antenna, screw, wrench, remote controller, power cable							




Vlastnosti:

- 2K / 4K displej s tvrzeným sklem a super tenkým kovovým krytem s 8,5 mm rámečkem.
- Tepelně odolný LCD panel průmyslové třídy A s nepřetržitým provozem.
- Technologie QWP LCD panelu s vysokým viditelným výkonem.
- Vysoký jas - 2 500 Nit / 3 000 Nit / 3 500 / 4 000 Nit.
- Nízko šumový design - Vhodné pro okenní displeje.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd).
- Jednostranný / oboustranný design LCD obrazovky.
- Možnost podlahového / nástěnného / závěsného typu.



Vitrínové a výlohové LCD obrazovky

LCD Panel	Diagonal Size	32-inch	43-inch	49-inch	55-inch	65-inch
	Resolution	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160
	Active Area	704.8mm x 399.3mm	543.8mm x 633.8mm	1078.8mm x 608.8mm	1213.8mm x 681.8mm	1432.8mm x 807.8mm
	LCD Panel	Industrial A Grade High Heating-Resistance LCD Panel				
	Display Ratio	9:16 / 16:9				
	Brightness	3500 Nit	3500 Nit	3500Nit	3500 Nit	2500 Nit
	Brightness Control	Auto brightness control				
	Contrast Ratio	1200:1				
	Display Colors	16.7M				
	View Angle	178° (H) /178° (V))				
	Response Time	≤6ms				
	Tempered Glass	Tempered high transparency glass protection				
	Bezel	8.5mm				
	Working Hour	7x 24 hours				
	Panel Life	≥50000 hours				
Built-in Android Media Board	System Version	Android Version				
	Chipset	RK3288 quad ARM Cortex-A7,main frequency 1.8GHz				
	ROM	16G EMMC				
	RAM	2G DDR3				
Connectivity	HDMI	1 x HDMI 1.4				
	USB	2 x USB 2.0				
	RJ45	1X RJ45				
	TF Card Slot	Yes				
	USIM Card Slot	Option				
Network	Built-in Louder Speaker	2 x 8Ω 5W louder speaker				
	Ethernet	10M/100M/1000M Ethernet				
	WIFI	Yes				
Digital Signage Software	Bluetooth	Yes				
	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.				
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format				
	Image Format	BMP/JPEG/PNG/GIF,etc.				
	File Format	PPT/Word/Excel/PDF				
	Flash	Support				
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play				
Other		Scroll caption, weather time control, support live streaming, third party integration				
	Remote Management Software	Cloud/local digital signage software				
	Power Consumption	≤ 100 W	≤ 230 W	≤ 290 W	≤ 320W	≤ 400 W
	Power Supply Voltage	AC240V to 110V (50 HZ/ 60HZ)				
	Net Wight	6.8 kg	16.6 kg	23 kg	24 kg	32kg
	Enclosure	Industrial Metal steel enclosure with black color or customized color				
	Outline Dimension(mm)	721.7 x 416 x 57	962.8 x 550 x 57	1095 x 625 x 57	1220.8 x701 x 57	1449.8 x 825 x 57
	Working Temperature	-10 °C ~ 50 °C				
	Working Humidity	10 %-90% (No-Condensing)				
	Storage Temperature	-20 °C ~ 60 °C				
	Storage Humidity	10% ~90%(No Condensing)				
	Accessories	WIFI Antenna, Remote Controller, Power Cord				
	Installation Wrench & necessary screws & Installation Bracket					

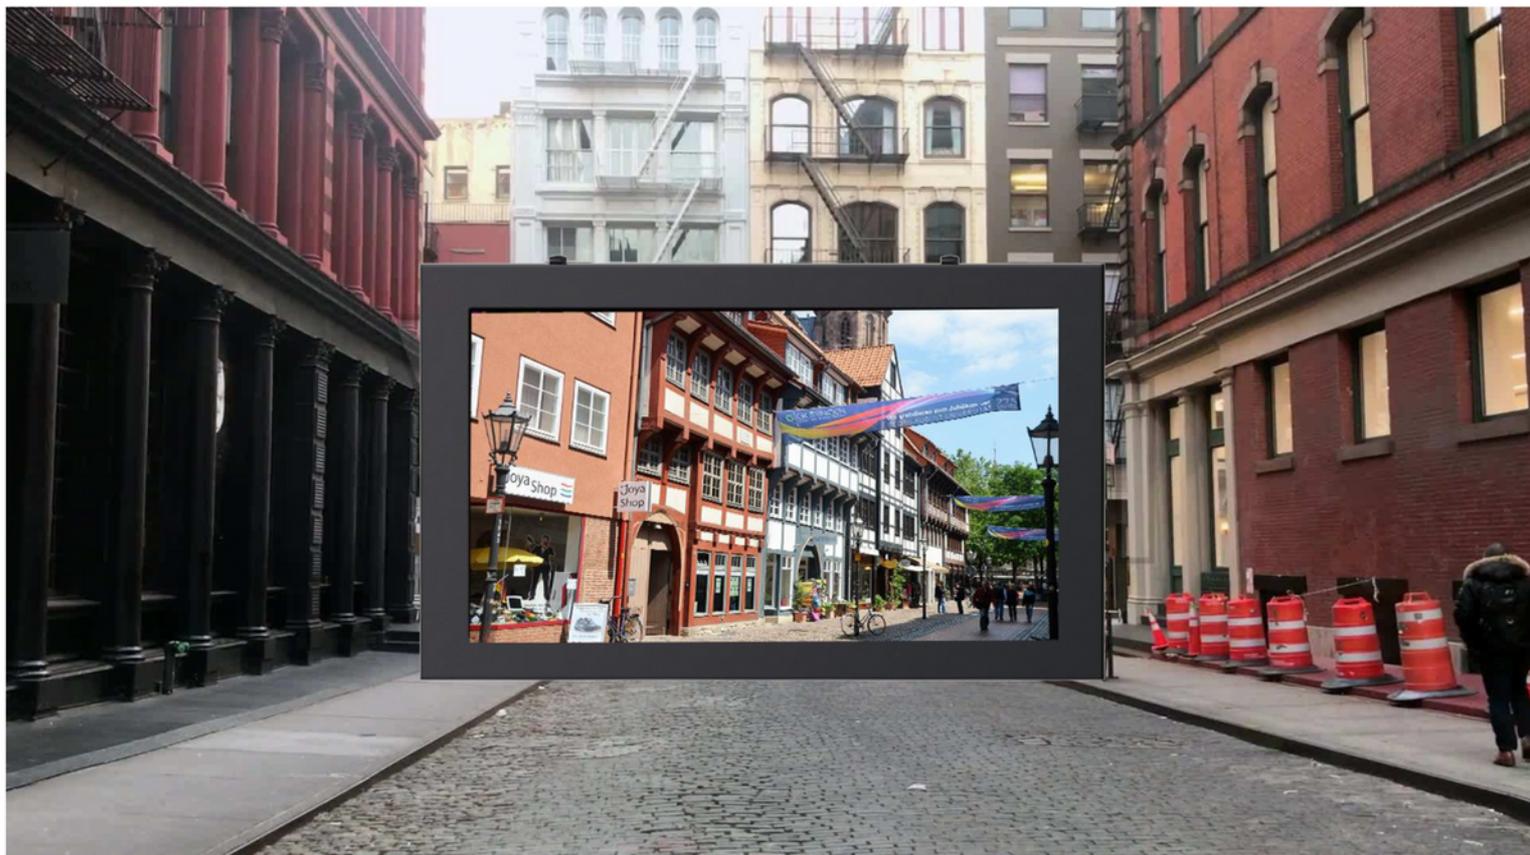

Vlastnosti:



- Konstrukce průmyslového stojanu s SGCC pozinkovanou ocelovou deskou s vnitřním povrchovým zinkovým práškem a vnější povrch s plastovým práškem Dupont Outdoor s více než 10 let životnosti.
- Modifikovaný design pro flexibilní a nepřetržitou údržbu.
- Vodotěsný, prachotěsný, proti slunečnímu záření, proti korozi, ultrafialová rezistence. Ochrana proti krádeži, ochrana proti vlhkosti, ochrana proti blesku, ochrana proti elektrickému úniku.
- Full HD LCD panel s vysokým jasem (2000 Nit) a inteligentním jasem.
- Klimatizace (IP65) / Systém chlazení vzduchu.
- Časový spínač, nárazuvzdorný, napájecí zdroj vojenské kvality.
- Operační systém Windows / Android.
- Normální tvrzené sklo / 6mm AR Antireflexní vrstvené tvrzené sklo s 97% propustností světla a odrazivost 3%.
- Podpora vzhledu hardwaru a přizpůsobení modulu.



Outdoor LCD obrazovka na stěnu

LCD Display	Diagonal Size	32-inch	43-inch	49-inch	55-inch	65-inch	75-inch	86-inch
	Display Area	698mm x 393mm	941mm x 529mm	1072mm x 602mm	1210mm x 681mm	1428mm x 803mm	1650mm x 928mm	1895mm x 1066mm
	Resolution	1920 x 1080						
	Brightness	2000cd/m ² /2500 cd/m ²						
	View Angle	H: 178°/V: 178°						
General	Outside Dimension	910mm x 653mm x 150mm	1145mm x 770mm x 150mm	1285mm x 845mm x 170mm	1420mm x 920mm x 200mm	1630mm x 1045mm x 220mm	1860mm x 1170mm x 220mm	2105mm x 1310mm x 220mm
	Working Temperature	-30°C ~ +55°C						
	Working Humidity	5%-90% RH						
	Professional Enclosure	Industrial Stand Case Design with SGCC Galvanized Steel Plate with Internal Surface Zinc Powder and External Surface with Dupont Outdoor Plastic Powder						
		Waterproof, Dustproof, Anti-sunshine, Anti-corrosion, Ultraviolet Resistance, Anti-theft, Anti-Moisture						
	Test System	Spray water-proof testing, Temperature Environmental testing, Solar Radiation testing, pre-delivery aging test						
	Electronic Control System	Leakage-proof and Over-voltage protection						
Shockproof(C grade Shockproof preventing instant lightning strike)								
Military quality power supply(Stable and reliable)								
Option	Operating System	Windows / Android Operating System						
	Touchable Screen	Nano Touch/ Capacitive Touch						
	Smart Temperature System	Air condition / cooling fan + industrial heating module						

Různé druhy designu






Vlastnosti:

- 90 mm Super tenký vzhled se 40mm úzkým rámem. Průmyslové provedení bez ventilátoru. Venkovní kryt. 95 % zobrazovací plochy.
- Odolný vysoký teplotě (Endure 110°C LCD).
- Vysoký jas 2500 Nit s pracovní dobou 24 x 7 hodin.
- Živý vizuální výkon QLED s technologií proti slunečnímu záření (Anti-glare), viditelný i se slunečními brýlemi.
- Automatická kalibrace jasu s ochranou životního prostředí a nízkou spotřebou.
- Vysoce odolné tvrzené sklo IK10 s 9mm dvojitým sklem AR pro ochranu celé obrazovky.
- Interaktivní 10 bodový dotyk. Možnost kapacitní dotykové obrazovky.
- Stupeň krytí IP66. Vysoká stabilita, Vodotěsnost, prachotěsnost, ochrana proti slunečnímu záření, proti korozi, odolnost proti ultrafialovému záření, proti krádeži, proti vlhkosti. Ochrana proti bouři, Ochrana proti úniku elektrického proudu.



Outdoor LCD obrazovka nové generace

LCD Panel	Diagonal Size	32-inch
	Resolution	1920 x 1080
	Display Area(mm)	698 x 392
	LCD Panel	high temperature resistance Industrial A Grade Panel (110°C)
	Viewing Angle	178° (H) / 178° (V)
	Response Time	≤6ms
	Display Ratio	9 : 16 / 16:9
	Contrast Ratio	3500 : 1
	Brightness	2500cd/m ²
	Working Hours	7 x 24 hours
	Lifespan	≥ 50000 Hours
	Brightness Calibration	auto light brightness calibration
	Temperature Adjust	auto temperature calibration
	Tempered glass	SMT AG glass with vandal-proof protection grade(Anti-Glare)
	Touch Screen	10 points capacitive touch screen
Built-in PC Mainboard	System	Compatible with windows OS
	CPU	Intel @ core i3-4000M dual core 2.4GHz
	Storage	4G DDR3/ 128 G EMMC
Connectivity	HDMI	1 x HDMI1.4
	USB	2x USB3.0, 2x USB2.0
	RJ45	1X RJ45
	Audio	1xMIC, 1 x line out
	Built-in Louder Speaker	2x 8W louder Speaker
Network Connection	Ethernet	10M/100M/1000M adaptive Ethernet
	WIFI	Yes
Outline Enclosure	Enclosure Material	Customized frame + SGCC Galvanized steel enclosure
	Enclosure Design	Waterproof, Dustproof, Anti-sunshine, Anti-corrosion, Ultraviolet Resistance, Anti- theft, Anti-Moisture
	Protection Grade	IP66
	Enclosure Color	Black color
	Frame Width	38mm for surrounding frame
	Outline Dimension(mm)	778mm(W) x 473mm(H) x 90mm(D)
	Installation Type	Landscape/Vertical Installation
Working Situation	Power Supply	AC110V~240V 50HZ/60HZ
	Power Consumption	≤130W
	Working Temperature	-30°C ~ +80°C
	Working Humidity	10% ~ 90% (No-Condensation)
	Storage Temperature	-35°C ~ 60°C
	Storage Humidity	10% ~ 90% (No-Condensation)

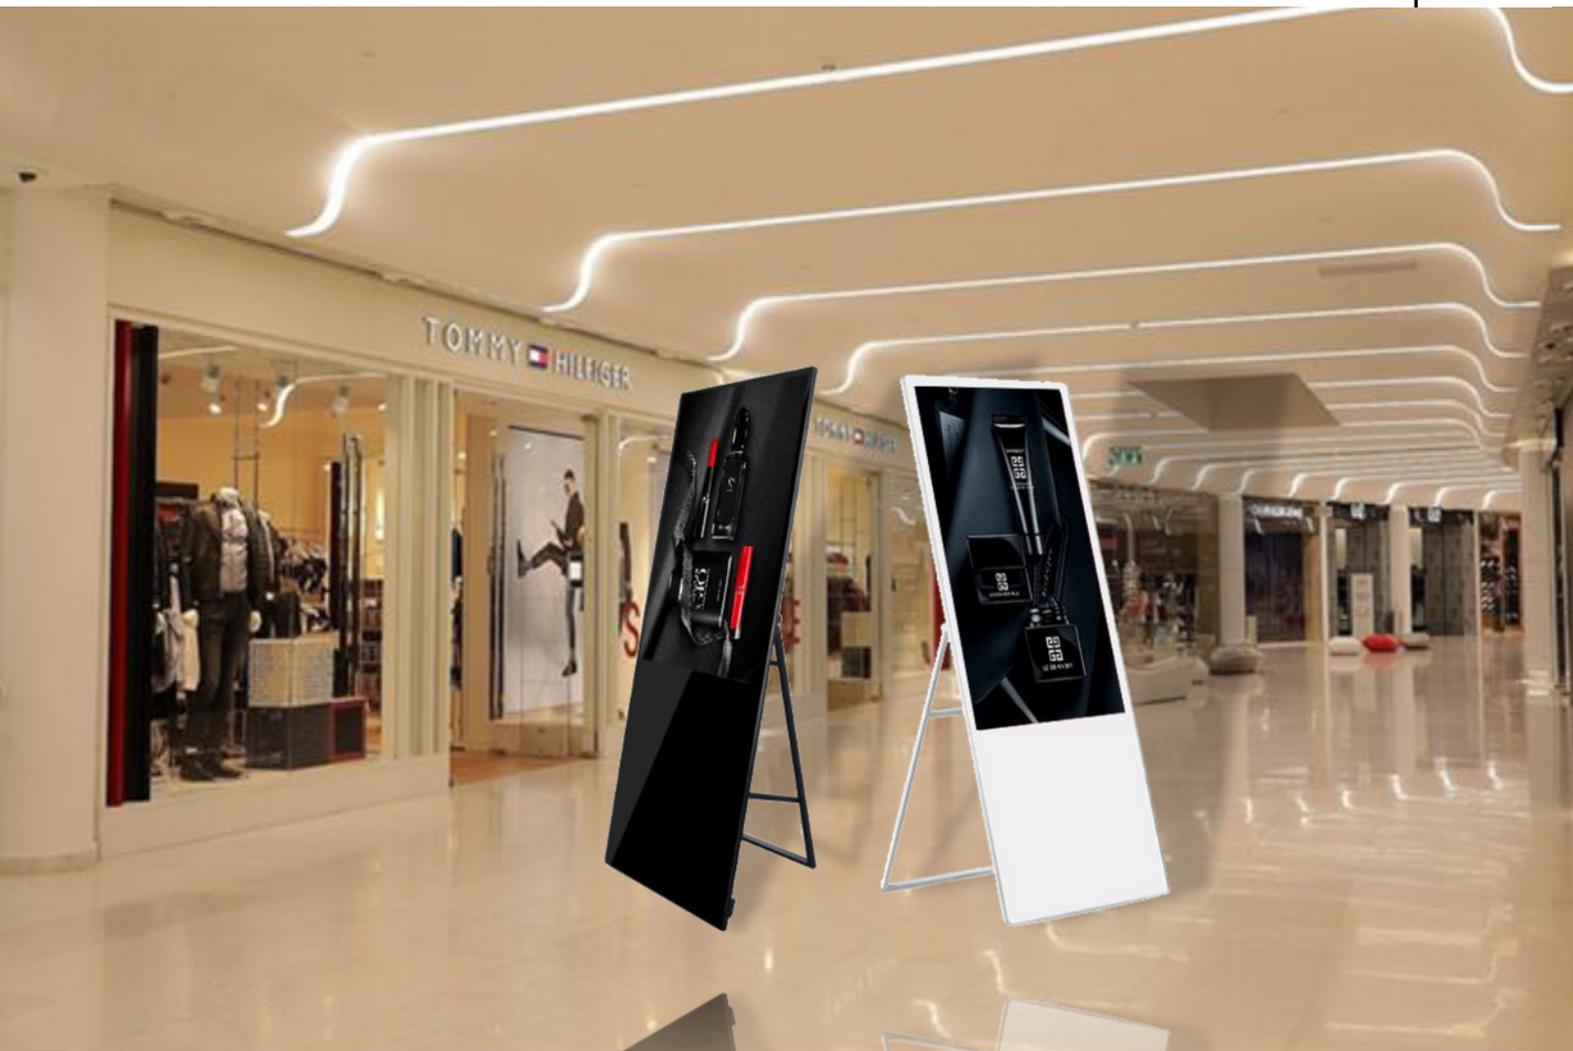

Vlastnosti:



- Ultra super tenká skládací, přenosná a designová stojka v různých velikostech.
- Pouzdro ze slitiny a plně tvrzené sklo.
- Režim zobrazení rozdělené nebo zkombinované obrazovky.
- Integrovaná deska Android Media Player Board.
- 24h Loop Play.
- Full HD živý displej.
- Připojení LAN/WIFI.
- Možnost Kapacitní / IR dotykové obrazovky.



LCD skládací stojka "A"

LCD Panel	Model	LW32FD	LW43FD	LW55FD
	Dimension	32"	43"	55"
	Brightness	350 cd/m ² (Typical)		
	Brand	BOE/CSOT/LG		
	Color Gamut	16.7M		
	View Angle	178° (H) /178° (V)		
	Tempered Glass	tempered glass protection		
	Panel Life	≥50000 hours		
Operation System (Option)	System	Android System		
Digital Signage Software(option)	Video Format	Wmv/avi/flv/rm/mvb/mpeg /ts/mp4,etc.		
	Audio Format	MP3/WAV all audio format		
	Image Format	BMP/JPEG/PNG		
	Language	Multiple countries language interface		
	Multiple Play Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play		
	Remote Management	Cloud Digital Signage Software		
General	Network Interface	RJ45/IEEE1802.31/100M ETHERNET LAN/WIFI		
	Port Interface	HDMI*1/USB*2/USIM Card Slot/TF card Slot		
	Audio	Left channel, right channel, 8Ω 5W speaker		
	Power Supply	AC220V to 110V(50-60HZ)		
	Housing	High-Grade Alloy mental housing , Aluminum Frame, Customized Color		
	Frame Color	Black/ white, other color customized		
	Working Temperature	-20 °C ~ 50 °C		
	Working Humidity	5%-90%		
	Storage Temperature	-40 °C ~ 60 °C		
	Storage Humidity	90%(No humidity)		
Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable			

Specifications are subject to change without prior notice.




Vlastnosti:

- FHD / 2K / 4 K displej s tvrzeným sklem a super tenkým kovovým krytem.
- Tepelně odolný LCD panel průmyslové třídy A s nepřetržitým provozem.
- Technologie QWP LCD panelu s vysokým viditelným výkonem.
- Vysoký jas - 2 500 Nit / 3 000 Nit / 3 500 / 4 000Nit.
- Nízko šumový design - Vhodné pro okenní displeje.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd).
- Jednostranný / oboustranný design LCD obrazovky.
- Možnost podlahového / nástěnného / závěsného typu.



Oboustranné výlokové LCD obrazovky


LCD Panel	Diagonal Size	43-inch	49-inch	55-inch
	Resolution	1080 x 1920	2160 x 3840	2160 x 3840
	Active Area	529.4mm x 941.2mm	604mm x 1073.78mm	680.4 mm x 1209.6mm
	LCD Panel	Industrial A Grade High Heating-Resistance LCD Panel		
	Screen	Double -sided LCD screen		
	Display Ratio	9:16		
	Brightness	700 Nit + 2500Nit(Auto Lighting Control)		
	Contrast Ratio	1200:1		
	Display Colors	16.7M		
	View Angle	178° (H) /178° (V))		
	Response Time	≤6ms		
	Tempered Glass	Tempered high transparency glass protection		
	Working Hour	7x 24 hours		
	Panel Life	≥50000 hours		
Built-in Android Media Board	System Version	Android 7.1 Version		
	Chipset	RK3288 quad ARM Cortex-A7,main frequency 1.8GHz		
	ROM	16G EMMC		
	RAM	2G DDR3		
Connectivity	HDMI	1 x HDMI 1.4		
	USB	2 x USB 2.0		
	RJ45	1X RJ45		
	TF Card Slot	Yes		
	USIM Card Slot	Option		
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker		
	Built-Fan Design	Support		
Network	Ethernet	10M/100M/1000M Ethernet		
	WIFI	Yes		
	Bluetooth	Yes		
Digital Signage Software	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.		
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format		
	Image Format	BMP/JPEG/PNG/GIF,etc,		
	File Format	PPT/Word/Excel/PDF		
	Flash	Support		
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play		
		Scroll caption, weather time control, support live streaming, third party integration		
Remote Management Software	Cloud/local digital signage software			
Other	Power Consumption	≤ 300W	≤ 330W	≤380W
	Power Supply Voltage	AC240V to 110V (50 HZ/ 60HZ)		
	Net Wight	35kg	42 kg	48kg
	Enclosure	Industrial Metal steel enclosure with black color or white color		
	Outline Dimension(mm)	1279.3 x 592.5 x 54.6	1412.3 x 643.7 x 54.6	1546.3 x 718.7 x 54.6
	Working Temperature	-10 °C ~ 50 °C		
	Working Humidity	10 %-90% (No-Condensing)		
	Storage Temperature	-20 °C ~ 60 °C		
	Storage Humidity	10% -90%(No Condensing)		
	Accessories	WIFI Antenna, Remote Controller, Power Cord		
		Installation Wrench & necessary screws & Installation Bracket		



Vlastnosti:




- 4K/Full HD displej s tvrzeným sklem a kovovým krytem.
- Samostatná verze, Síťová verze (možnost Windows / Android)
- Možnost jednostranné a oboustranné obrazovky.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.
- Instalace k zavěšení.

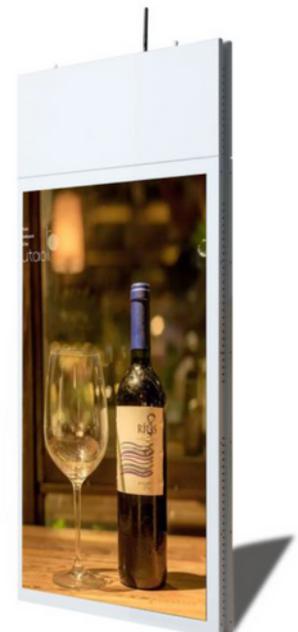

Oboustranné LCD obrazovky

LCD Panel	Model	LW43HD	LW49HD	LW55HD
	Diagonal Size	43inch	49inch	55inch
	Resolution	1080 x 1920		
	Display Ratio	9:16		
	Brightness	350 Nit/700Nit(option)		
	Pixel Pitch	0.124 x 0.372		
	Display Area	1427.5 mm x 802.5 mm		
	Contrast Ratio	3000:1		
	View Angle	178° (H) /178° (V))		
	Response Time	5ms		
	Tempered Glass	3 mm tempered glass protection		
Operation System	System Version	Android 7.1 Version		
	Chipset	RK3288 quad ARM Cortex-A7,main frequency 1.2GHz		
	ROM	16G		
	RAM	2G		
Function	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.		
	Audio Format	MP3/WAV all audio format		
	Image Format	BMP/JPEG/PNG		
	Language	Multiple language option		
	Multiple Display Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play		
	Remote Management Software	support		
General	Network Interface	RJ45/IEEE1802.31/100M ETHERNET LAN/WIFI		
	Port Interface	HDMI*1/USB*2/RJ45/WIFI antenna		
	Louder Speaker	Left channel, right channel, 8Ω 5W speaker		
	Power Consumption	≤150 W		
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)		
	Housing	1.5mm High-Grade Alloy mental housing Aluminum Frame		
	Working Temperature	-20 °C ~ 50 °C		
	Working Humidity	5%-90%		
	Storage Temperature	-20 °C ~ 60 °C		
	Storage Humidity	90%(No humidity)		
	Installation Method	Hang type instllation		
Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable			



Vlastnosti:



- 4K/Full HD displej s tvrzeným sklem a kovovým krytem.
- Samostatná verze, Síťová verze (možnost Windows / Android)
- Možnost jednostranné a oboustranné obrazovky.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.
- Instalace k zavěšení.



Oboustranné LCD obrazovky

LCD Panel	Model	LW43HD-S	LW49HD-S	LW55HD-S
	Diagonal Size	43inch	49inch	55inch
	Resolution	1080 x 1920		
	Display Ratio	9:16		
	Brightness	350 Nit/700Nit(option)		
	View Angle	178° (H) /178° (V))		
	Response Time	5ms		
	Tempered Glass	tempered glass protection		
Operation System	System Version	Android 7.1 Version		
	Chipset	RK3288 quad ARM Cortex-A7,main frequency 1.2GHz		
	ROM	16G		
	RAM	2G		
Function	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.		
	Audio Format	MP3/WAV all audio format		
	Image Format	BMP/JPEG/PNG		
	Language	Multiple language option		
	Multiple Display Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play		
	Remote Management Software	support		
General	Network Interface	RJ45/IEEE1802.31/100M ETHERNET LAN/WIFI		
	Port Interface	HDMI*1/USB*2/RJ45/WIFI antenna		
	Louder Speaker	Left channel, right channel, 8Ω 5W speaker		
	Power Consumption	≤150 W		
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)		
	Working Temperature	-20 °C ~ 50 °C		
	Working Humidity	5%-90%		
	Storage Temperature	-20 °C ~ 60 °C		
	Storage Humidity	90%(No humidity)		
	Installation Method	Hang type installation		
Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable			




Vlastnosti:

- Ultra super tenký design se slitinovým pouzdem a plně tvrzeným sklem.
- Samostatně stojící verze s Android OS / Windows OS (volitelně), síťová verze.
- Režim zobrazení rozdělené nebo zkombinované obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Základní CMS (SW pro vzdálenou správu) zdarma.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.



Indoor oboustranný interaktivní kiosek

LCD Panel	Model	LW32DS	LW43DS	LW49DS	LW55DS	LW65DS
	Dimension	32"	43"	49"	55"	65"
	Brightness	350 cd/m ² (Typical)/500 cd/m ² /700 cd/m ²				
	Color Gamut	16.7M				
	View Angle	178° (H) /178° (V))				
	Tempered Glass	tempered glass protection				
	Double Screen	Double LCD Screen Design				
	Display Content	Sync/ Unsync display content				
	Touch Screen	Multiple Capacitive /IR Touch Points				
	Panel Life	≥50000 hours				
Operation System (Option)	System	Windows/Android option				
Digital Signage Software(option)	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.				
	Audio Format	MP3/WAV all audio format				
	Image Format	BMP/JPEG/PNG				
	Language	Multiple countries language interface				
	Multiple Play Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play				
	Remote Management	Cloud Digital Signage Software				
General	Audio	Left channel, right channel, 8Ω 5W speaker				
	Power Supply	AC220V to 110V(50-60HZ)				
	Housing	High-Grade Alloy mental housing , Aluminum Frame, Customized Color				
	Frame Color	Black/ white, other color customized				
	Working Temperature	-20 °C ~ 50 °C				
	Working Humidity	5%-90%				
	Storage Temperature	-40 °C ~ 60 °C				
	Storage Humidity	10%~90%(No humidity)				
	Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable				



Vlastnosti:



- Full HD displej s tvrzeným sklem a 1,5 mm vysoce kvalitním hliníkovým krytem.
- Samostatně stojící verze s Android OS / Windows OS (volitelně), síťová verze.
- Možnost vertikální / horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Základní CMS (SW pro vzdálenou správu) zdarma.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.



Totem na letáky s LCD

LCD Panel	Model	LW215M	LW43M
	Diagonal Size	21.5-inch	43-inch
	Resolution	1920*1080	
	Display Area	476.64 (H) x 268.11 (V)	946.896(H) x 529.254 9V)
	Brightness	350cd/m ² (Typical)	
	Color Color	16.7M	
	Contrast Ratio	1400:1	
	View Angle	178° (H) /178° (V))	
	Tempered Glass	Yes	
	Panel Life	≥60000 hours	
	Touch	10 points capacitive Touch	
Operation System	Chipset	RK3288, quad ARM Cortex-A7,main frequency 1.5GHz	
	Android Version	Android 6.0	
	ROM	16G	
	RAM	1G	
Function	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.	
	Audio Format	MP3/WAV all audio format	
	Image Format	BMP/JPEG/PNG	
	Language	Multiple countries language interface	
	Multiple Play Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play	
	Remote Management	Yes	
	Backend CMS	yes	
General	Network Interface	RJ45/IEEE1802.31/100M ETHERNET LAN/WIFI	
	Port Interface	HDMI*1/USB*2/TF card*1	
	Audio	Left channel, right channel, 8Ω 5W speaker	
	Power Consumption	≤40W	≤60W
	Power Supply	AC220V to 110V(50-60HZ)	
	Housing	1.5mm High-Grade Alloy mental housing , Aluminum Frame, black color	
	Frame Color	Black/ white, other color customized	
	Working Temperature	-20 °C ~ 50 °C	
	Working Humidity	5%-90%	
	Storage Temperature	-40 °C ~ 60 °C	
	Storage Humidity	90%(No humidity)	
	Accessories	Wall mount ,WIFI Antenna, screw, wrench, key, remote controller, power cable	



Vlastnosti:



- Full HD displej s tvrzeným sklem a super tenkým tělem SPCC kiosku.
- Živé a bohaté zobrazení barev.
- LCD panel průmyslové třídy A s nepřetržitým provozem.
- Super Wide 178° (H/V) Úhel pohledu.
- Samostatně stojící verze s Android OS / Windows OS (volitelně), síťová verze.
- Možnost vertikální / horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky.
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Základní CMS (SW pro vzdálenou správu) zdarma.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.
- Možnost modulu skeneru QR / kamery.
- Typ K / typ S základní stojan / Možnost přizpůsobení.



Interaktivní K / S styl kiosky - Intel s Windows OS

LCD Panel	Diagonal Size	32inch	43inch	49inch	55inch	65inch
	Display Area(mm)	699.4 x 393.9	942.2 x 530.4	1073.8 x 604	1211.4 x 682.2	1428.5 x 803
	LCD Panel	Commercial A Grade LCD Panel				
	Resolution	1080 x 1920				
	Display Ratio	9:16				
	Brightness	350 cd/m ² (typical)				
	Contrast Ratio	5000:1				
	Display Colors	1.07G				
	View Angle	178° (H) /178° (V))				
	Response Time	≤5ms				
	Tempered Glass	Tempered high transparency glass protection				
	Touch Frame	10 Points Capacitive /IR Touch				
	Working Hour	7x 24 hours				
	Panel Life	≥60000 hours				
Built-in PC Mainboard	Windows Version	Windows 10				
	Processor	Intel @Core i3/i5/i7, dual core 2.5GHz				
	Display	Comprehensive Intel HD Graphics 4600 core display card				
	Storage	4G DDR3 (8G) 128SSD(256SSD)				
Connectivity	HDMI	1 x HDMI 1.4				
	VGA	1 x VGA				
	USB	2 x USB 2.0, 2 x USB3.0				
	RJ45	1 X RJ45				
	Audio	1* Line out, 1*MIC				
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker				
Network	Ethernet	10M/100M/1000M Ethernet				
	WIFI	Yes				
	Bluetooth	Yes				
Other	Power Consumption	≤50W	≤60W	≤65W	≤75W	≤85W
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)				
	Enclosure	White/Black/Silver (color customization)				
	Working Temperature	-20 °C ~ 50 °C				
	Working Humidity	10 %-90% (No-Condensing)				
	Storage Temperature	-40 °C ~ 60 °C				
	Storage Humidity	10% ~90%(No Condensing)				
	Accessories	WIFI Antenna, Power Cord Installation Wrench & necessary screws				

Interaktivní K / S styl kiosky - Android OS

LCD Panel	Diagonal Size	32 inch	43 inch	49 inch	55 inch	65 inch
	Display Area(mm)	699.4 x 393.9	942.2 x 603.5	1073.8 x 604	1211.4 x 682.2	1428.5 x 803
	LCD Panel	Industrial A Grade LCD Panel				
	Resolution	1080 x 1920				
	Display Ratio	9:16				
	Brightness	350 cd/m ² (typical)				
	Contrast Ratio	5000:1				
	Display Colors	1.07G				
	View Angle	178° (H) /178° (V))				
	Response Time	≤5ms				
	Tempered Glass	Tempered high transparency glass protection				
	Working Hour	7x 24 hours				
	Panel Life	≥60000 hours				
	Touch Screen	10 points capacitive or IR touch screen				
Built-in Android Board	System Version	Android 7.1 Version				
	Chipset	RK3288 quad ARM Cortex-A7,main frequency 1.8GHz				
	ROM	16G EMMC				
	RAM	2G DDR3				
Connectivity	HDMI	1 x HDMI 1.4				
	USB	2 x USB 2.0				
	RJ45	1X RJ45				
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker				
Network	Ethernet	10M/100MEthernet				
	WIFI	Yes				
	Bluetooth	Yes				
Digital Signage Software	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.				
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format				
	Image Format	BMP/JPEG/PNG/GIF,etc,				
	File Format	PPT/Word/Excel/PDF				
	Flash	Support				
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play				
		Scroll caption, weather time control, support live streaming, third party integration				
Remote Management Software	Cloud/local digital signage software					
Other	Power Consumption	≤45W	≤55W	≤60W	≤70W	≤80W
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)				
	Enclosure Color	White/Black/Silver (color customization)				
	Working Temperature	-20 °C ~ 50 °C				
	Working Humidity	10% %-90% (No-Condensing)				
	Storage Temperature	-40 °C ~ 60 °C				
	Storage Humidity	10% ~90%(No Condensing)				
	Accessories	WIFI Antenna, Remote Controller, Power Cord				
Installation Wrench & necessary screws						

Interaktivní K / S styl kiosky - různé barvy



Silver Color



White Color



Black Color

K styl - barevné varianty (možnost vlastní barvy)



Silver Color





White Color



Black Color

S styl - barevné varianty (možnost vlastní barvy)

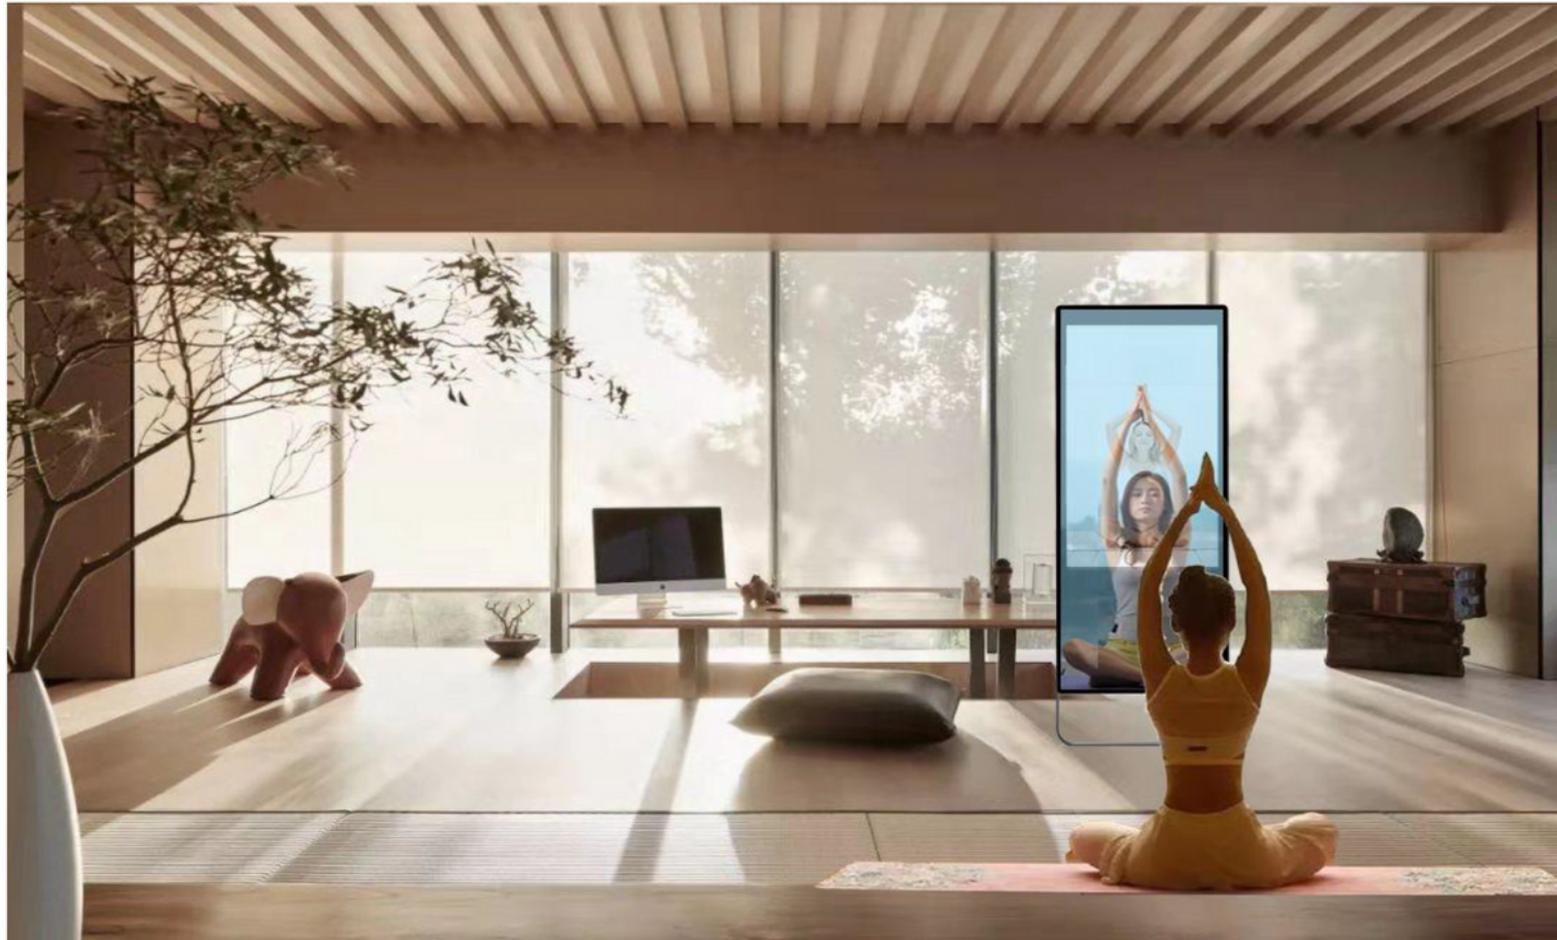

Vlastnosti:




- Full HD LCD monitor se zrcadlovou povrchovou úpravou.
- Rám tažený oxidovaným drátem z hliníkové slitiny.
- Super široký pozorovací úhel až 178 st.
- 10bodové kapacitní dotyková obrazovka s více gesty.
- Možnost operačního systému Android / Windows.
- Připojení k síti WIFI / Ethernet / LAN.
- Vestavěný efekt prostorového hlasitějšího reproduktoru.
- Opakování přehrávání a načasování přehrávání obsahu.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si obsah ve více formátech.
- Možnost vestavěného fotoaparátu.
- Montáž na stěnu / na podlahu.
- Open Media Board for Third Party Develop APP.



Smart fitness LCD zrcadlo

LCD Panel	Model	LW32SK	LW43SK
	Diagonal Size	32-inch	43inch
	LCD Panel	Industrial A Grade LCD Panel	
	Resolution	1080 x 1920	
	Display Ratio	9:16	
	Brightness	350 cd/m ² / 700 cd/m ² (typical)	
	Contrast Ratio	5000:1	
	Display Colors	1.07G	
	View Angle	178° (H) /178° (V))	
	Response Time	≤5ms	
	Touch Frame	G+G 10 Points Capacitive Touch(60 million times at same position)	
	Working Hour	7x 24 hours	
	Panel Life	≥60000 hours	
Built-in Android Media Board	System Version	Android 7.1 Version	
	Chipset	RK3288 quad ARM Cortex-A7,main frequency 1.8GHz	
	ROM	16G EMMC	
	RAM	2G DDR3	
Connectivity	HDMI	1 x HDMI 1.4	
	USB	2 x USB 2.0	
	RJ45	1X RJ45	
	TF Card Slot	Yes	
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker	
Network	Ethernet	10M/100M/1000M Ethernet	
	WIFI	Yes	
	Bluetooth	Yes	
	3G/4G	Option	
Digital Signage Software	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.	
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format	
	Image Format	BMP/JPEG/PNG/GIF,etc,	
	File Format	PPT/Word/Excel/PDF	
	Flash	Support	
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play	
		Scroll caption, weather time control, support live streaming, third party integration	
Remote Management Software	Cloud/local digital signage software		
Other	Power Consumption	≤45 W (Typ)	≤60 W (Typ)
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)	
	Outline Dimension	1600mm(H) x 500mm(W) x 42mm (T)	1700mm(H) x 608mm(W) x 42mm(T)
	Net Weight	20kg	25kg
	Enclosure	Aluminum alloy oxidized wire drawn frame	
	Enclosure Color	Silver / Black Color	
	Working Temperature	-20 °C ~ 50 °C	
	Working Humidity	10% %-90% 9 (No-Condensing)	
	Storage Temperature	-40 °C ~ 60 °C	
	Storage Humidity	10% ~90%(No Condensing)	
	Accessories	WIFI Antenna, Remote Controller, Power Cord	
		Installation Wrench & necessary screws	



Vlastnosti:




- 2k LCD monitor se zrcadlovou povrchovou úpravou.
- Rám tažený oxidovaným drátem z hliníkové slitiny.
- Super široký pozorovací úhel až 178 st.
- Možnost operačního systému Windows / Android.
- 10bodové kapacitní dotyková obrazovka s více gesty.
- Možnost vertikální / horizontální instalace.
- Připojení k síti WIFI / Ethernet / LAN.
- Vestavěný efekt prostorového hlasitějšího reproduktoru.
- 24/7 hodin v provozu



Smart LCD zrcadlo na zed'

LCD Panel	Model	LW22DW	LW32DW
	Diagonal Size	22-inch	32-inch
	Display Area	476.6mm x 268.1mm	697.4mm x 391.8mm
	LCD Panel	Commercial A Grade LCD Panel	
	Resolution	1920 x 1080	
	Display Ratio	16:9 / 9 : 16	
	Brightness	350 cd/m ² (typical) / 700 cd/m ²	
	Contrast Ratio	1300 :1	
	Display Colors	16.7M	
	View Angle	178° (H) /178° (V))	
	Response Time	≤6ms	
	Working Hour	7x 24 hours	
	Panel Life	≥50000 hours	
	Surface	Mirror surface treatment	
Touch Screen	Touch Way	Glass + Glass 10 points capacitive touch points	
	Response Time	≤6ms	
	Touch Accuracy	≥ 6mm	
	Touch Lifespan	≥ 60 million touch times	
Connectivity	HDMI	1 x HDMI input	
	DVI	1 x DVI input	
	VGA	1 x VGA input	
	Audio port	1x audio input, 1 x audio output	
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker	
Other	Power Consumption	≤ 30 W	≤ 45 W
	Power Supply Voltage	AC240V to 110V (50 HZ/ 60HZ)	
	Outline Dimension	514.6mm x 309.2mm x 50.7 mm	759.4 mm x 453.8mm x 62.4mm
	Installation	400x 400 Wall Mount Bracket (vertical & horizontal i)	
	Enclosure	Aluminum alloy oxidized wire drawn frame	
	Enclosure Color	Silver / Black Color	
	Working Temperature	-20 °C ~ 50 °C	
	Working Humidity	10% %-90% (No-Condensing)	
	Storage Temperature	-20 °C ~ 60 °C	
	Storage Humidity	10% ~90%(No Condensing)	

Specifications are subject to change without prior notice.

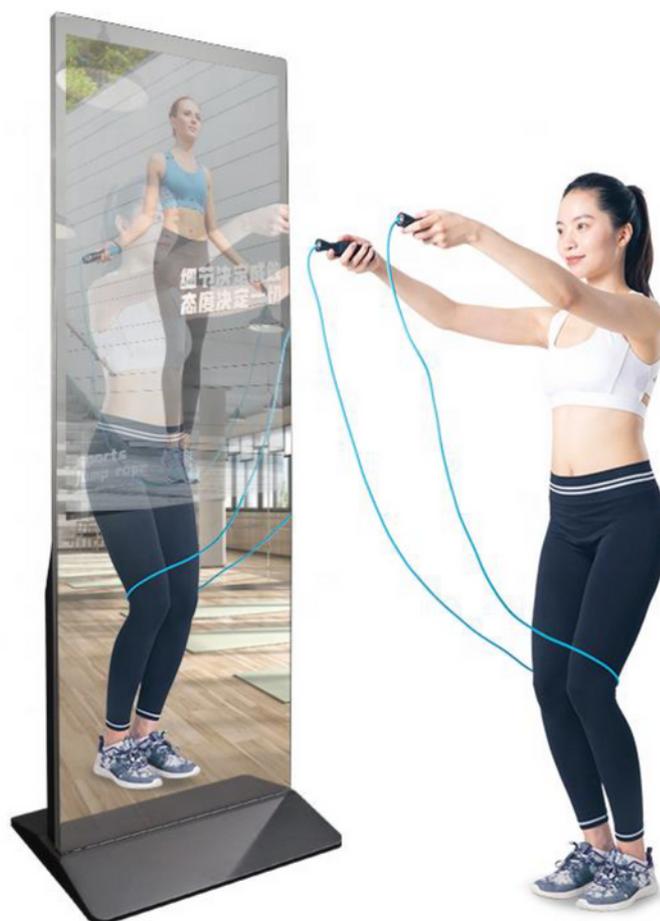

Vlastnosti:



- 2k LCD monitor se zrcadlovou povrchovou úpravou.
- Rám tažený oxidovaným drátem z hliníkové slitiny.
- Super široký pozorovací úhel až 178 st.
- Možnost operačního systému Windows / Android.
- 10bodové kapacitní dotyková obrazovka s více gesty.
- Možnost vertikální / horizontální instalace.
- Připojení k síti WIFI / Ethernet / LAN.
- Vestavěný efekt prostorového hlasitějšího reproduktoru.
- 24/7 hodin v provozu




Interaktivní Smart LCD zrcadlo



DIGIpromo

	Diagonal Size	32inch	43inch	49inch	55inch
LCD Panel	LCD Panel	Industrial A Grade LCD Panel with Mirror Glass			
	Resolution	1080 x 1920			
	Display Ratio	9:16			
	Brightness	350 cd/m ² (typical)			
	Contrast Ratio	5000:1			
	Display Colors	1.07G			
	View Angle	178° (H) /178° (V))			
	Response Time	≤5ms			
	Glass	Mirror Glass			
	Touch Frame	10 Points capacitive Touch(60 million times at same position)			
	Working Hour	7x 24 hours			
	Panel Life	≥60000 hours			
	Built-in Android Media Board	System Version	Android 7.1 Version		
Chipset		RK3288 quad ARM Cortex-A7,main frequency 1.8GHz			
ROM		16G EMMC			
RAM		2G DDR3			
Camera	Built-in top camera	8MP pixel (4K)			
Connectivity	HDMI	1 x HDMI 1.4			
	USB	2 x USB 2.0			
	RJ45	1X RJ45			
	TF Card Slot	Yes			
	USIM Card Slot	Yes			
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker			
Network	Ethernet	10M/100M/1000M Ethernet			
	WIFI	Yes			
	Bluetooth	Yes			
Digital Signage Software	Video Format	Wmv/avi/flv/rm/mvb/mpeg /ts/mp4,etc.			
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format			
	Image Format	BMP/JPEG/PNG/GIF,etc,			
	File Format	PPT/Word/Excel/PDF			
	Flash	Support			
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play			
		Scroll caption, weather time control, support live streaming, third party integration			
Remote Management Software	Cloud/local digital signage software				
Other	Power Consumption	≤60 W (Typ)			
	Power Supply Voltage	AC220V to 110V (50 HZ/ 60HZ)			
	Net Weight	41kg			
	Enclosure	Industrial Metal steel enclosure with black color or customized color			
	Working Temperature	-20 °C ~ 50 °C			
	Working Humidity	10% %-90% 9 (No-Condensing)			
	Storage Temperature	-40 °C ~ 60 °C			
	Storage Humidity	10% ~90%(No Condensing)			
	Accessories	WIFI Antenna, Remote Controller, Power Cord			
Installation Wrench & necessary screws					

Specifications are subject to change without prior notice.



Vlastnosti:




- Full HD displej s tvrzeným sklem a 1,5 mm vysoce kvalitním hliníkovým krytem.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Vícebodová kapacitní (PACP) dotyková obrazovka.
- Přední termální tiskárna s automatickým ořezáváním lístku.
- Možnost 2D a 3D scanneru čárového kódu / fotoaparátu / snímače NFC / POS.
- Možnost montáže na stěnu / na podlahu.



Prodejní LCD kiosek

LCD Panel	Model	LW27DC	LW32DC	LW43DC
	Size	27"	32"	43"
	Panel Brand	CSOT/BOE/LG		
	Diagonal Size	32-inch		
	Resolution	1920 X1080		
	Brightness	350cd/m(Typical)		
	Color Gamut	16.7M		
	Display Area	699mm x 393mm		
	View Angle	178° (H) /178° (V))		
	Tempered Glass	3mm tempered glass		
	Panel Lifespan	≥60000 hours		
	Touch Frame	Multiple points IR capacitive PACP touch		
Operating System (option)	System	Android/Windows Option		
Hardware(optional)	Internal Printer	Thermal printer (58mm)		
	Scanner	Barcode/QR Code Scanning		
	Sensor	NFC Module		
	Camera	2MP Full HD camera		
Software	Application	Customer Provided		
	System Language	Multiple Language Interface		
General	Ethernet	1*RJ45 (10M/100M self-adaptive Ethernet)		
	WIFI	802.1b/g/n /WIFI		
	Port Interface	1* HDMI input, 2 * USB2.0,,1*audio		
	Louder Speaker	8Ω 5W speaker		
	Power Consumption	≤120 W		
	Power Supply	AC220V to 110V(50-60HZ)		
	Net Weight	28kg		
	Housing	1.2mm High-Grade Alloy mental housing , Aluminum Frame, Customized Color		
	Frame Color	Black/ white, other color customized		
	Working Temperature	-20 °C ~ 50 °C		
	Working Humidity	5%-90%		
	Storage Temperature	-40 °C ~ 60 °C		
	Storage Humidity	90%(No humidity)		
	Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable		



Vlastnosti:




- Full HD displej s tvrzeným sklem a SPCC vysoce kvalitním hliníkovým krytem.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Vícebodová kapacitní (PACP) / IR dotyková obrazovka.
- Přední termální tiskárna s automatickým ořezáváním lístku.
- Možnost 1D a 2D scanneru čárového kódu / fotoaparátu / snímače NFC / POS.
- Možnost montáže na stěnu / na podlahu.



Prodejní LCD kiosek

LCD Panel	Model	LW27P	LW32P	
	Panel Brand	LG IPS A+ Grade Panel		
	Diagonal Size	27inch	32inch	
	Resolution	1920 X1080		
	Brightness	350cd/m(Typical)		
	Color Gamut	16.7M		
	View Angle	178° (H) /178° (V))		
	Tempered Glass	4mm high transparaency tempered glass protection		
	Panel Lifespan	≥60000 hours		
	Touch Frame	10 points capacitive PACP touch		
Operating System	Chipset	RK3228, quad ARM Cortex-A7,main frequency 1.8GHz		
	Android Version	Android system		
	ROM	16 G		
	RAM	2 G		
Thermal Printer	Method	Line Type Thermal Printer		
	Paper Width	80mm		
	Speed	8 dots/mm		
	Printer Dots	576dots/line		
Code Scanner	Image Sensor	CMOS		
	Resolution	640 x 480 (global shutter)		
	Communication way	TTL232,RS232,USB(HID,CDC)		
	Reading type	1D & 2D kinds read		
Software	Application	Customer Provided		
	System Language	Multiple Language Interface		
General	Ethernet	1*RJ45 (10M/100M self-adaptive Ethernet)		
	WIFI	802.1b/g/n /WIFI		
	Port Interface	1* HDMI input, 2 * USB2.0,1*audio		
	Louder Speaker	8Ω 5W speaker		
	Power Consumption	60W (typ)	80W (typ)	
	Power Supply	AC220V to 110V(50-60HZ)		
	Outline Dimension	413mm(W) x 1100mm (H) x 45mm(D)	1040mm(H) x 510mm(W) x 45cm(D)	
	Installation Type	Wall Mount / Floor Upstand		
	Housing	High-Grade SPCC Alloy mental housing , Aluminum Frame, Customized Color		
	Working Temperature	-20 °C ~ 50 °C		
	Working Humidity	5%-90%		
	Storage Temperature	-40 °C ~ 60 °C		
Storage Humidity	90%(No humidity)			
Accessories	WIFI Antenna, screw, wrench, key, power cable			

Specifications are subject to change without prior notice.

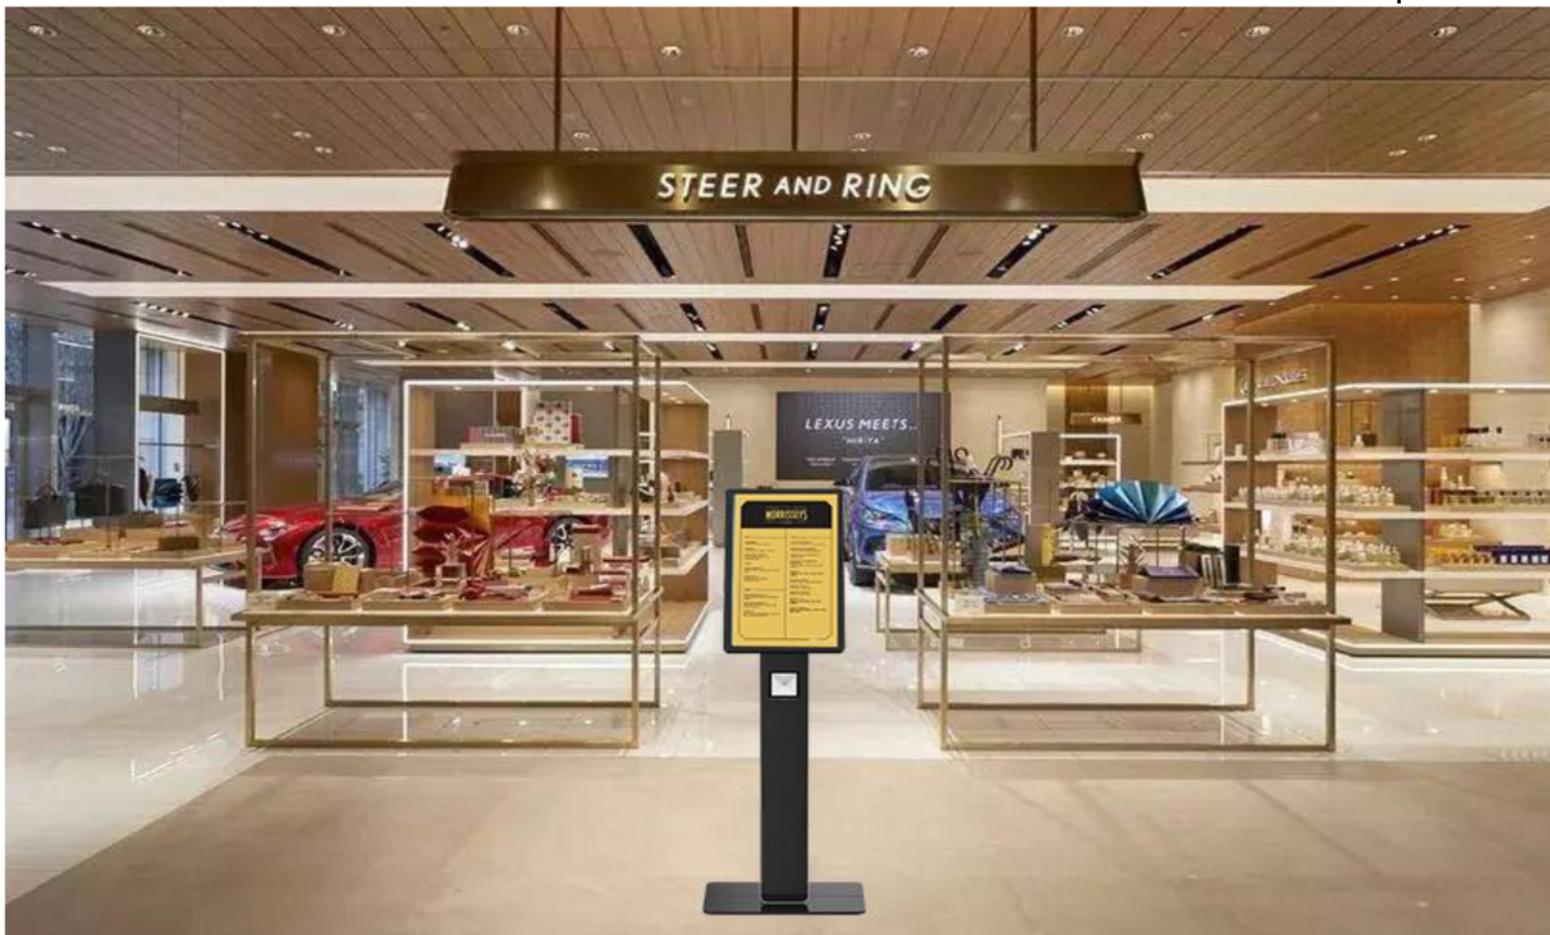

Vlastnosti:



- Full HD displej s tvrzeným sklem a hliníkovým krytem z prvotřídní slitiny.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Vícebodová kapacitní (PACP) dotyková obrazovka.
- Čtečka čárového kódu / fotoaparát / snímač NFC / POS / termální tiskárna.
- Možnost vertikální / horizontální instalace.
- Možnost montáže na stěnu / na podlahu.



Informační LCD stojánek

LCD Panel	Model	LW15SK	LW22SK
	Panel Brand	A+ Grade Panel	
	Diagonal Size	15.6 inch	21.5inch
	Resolution	1920 X1080	
	Brightness	350cd/m(Typical)	
	Color Gamut	16.7M	
	Display Area	304mm x 228mm	476mm x 268mm
	View Angle	178° (H) /178° (V))	
	Tempered Glass	4 mm tempered glass protection	
	Panel Lifespan	≥60000 hours	
	Touch Frame	Multiple points capacitive PACP touch	
Operating System	Chipset	RK3228, quad ARM Cortex-A7,main frequency 1.8GHz	
	Android Version	Android 6.1	
	ROM	16G	
	RAM	2G	
Code Scanner	Image Sensor	CMOS	
	Resolution	640 x 480 (global shutter)	
	Sensor	NFC Module	
	Communication Port	TTL232/RS232/USB	
	Code Recognition Format	2D/1D Code	
	Recognition Accuracy	5mil	
Software	Application	Customer Provided	
	System Language	Multiple Language Interface	
General	Ethernet	1*RJ45 (10M/100M self-adaptive Ethernet)	
	WIFI	802.1b/g/n	
	Port Interface	1* HDMI input, 2 * USB2.0,1*audio, 1* TF Card Slot	
	Louder Speaker	8Ω 5W speaker	
	Power Consumption	≤35W	≤60W
	Power Supply	AC220V to 110V(50-60HZ)	
	Enclosure	High-Grade Alloy mental housing , Aluminum Frame, anti-theft design black &white color	
	Working Temperature	-20 °C ~ 50 °C	
	Working Humidity	5%-90%	
	Storage Temperature	-40 °C ~ 60 °C	
	Storage Humidity	10%~90%(No humidity)	
Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable		



Vlastnosti:




- Full HD displej s tvrzeným sklem a hliníkovým krytem z prvotřídní slitiny.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Vícebodová kapacitní (PACP) dotyková obrazovka.
- Čtečka čárového kódu / fotoaparát / snímač NFC / POS / termální tiskárna.
- Možnost vertikální / horizontální instalace.
- Možnost montáže na stěnu / na podlahu.



Informační LCD stojánek

LCD Panel	Diagonal Size	13.3-inch
	LCD Panel	Commercial A Grade LCD Panel
	Resolution	1920(H) x 1080(V)
	Pixel Pitch	153 μm x 153 μm
	Display Ratio	16:9
	Active Area	293.6 mm(H) x 165.24 mm(V)
	Display Contrast	1500:1
	Brightness	350 cd/m ² (typical)
	Contrast Ratio	1300:1
	Display Colors	8 bit
	View Angle	178° (H) /178° (V))
	Response Time	≤ 6ms
	Screen Surface	FineAG25, 2H surface hardness
	Working Hour	7x 24 hours
	Panel Life	≥ 50000 hours
Built-in Android Media Board	System Version	Android 7.1 Version
	Chipset	RK3288 quad ARM Cortex-A17,main frequency 1.8GHz
	ROM	16G EMMC
	RAM	2G DDR3
Connectivity	HDMI Output	1 x HDMI 1.4
	USB	2 x USB 2.0
	RJ45	1X RJ45
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker
Network	Ethernet	10M/100MEthernet
	4G	Global 4G SIM Card Module
	WIFI	802.11 bgn
	Bluetooth	support
Digital Signage Software	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format
	Image Format	BMP/JPEG/PNG/GIF,etc.
	File Format	PPT/Word/Excel/PDF
	Flash	Support
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play
		Scroll caption, weather time control, support live streaming, third party integration
Remote Management Software	Cloud/local digital signage software	
Other	Power Consumption	≤ 13 W (Typ)
	Power Supply Voltage	AC240V to 110V (50 HZ/ 60HZ)
	Outline Dimension	1127.9 mm(H) x 280 mm(W) x 30mm(D)
	Enclosure	Industrial Metal steel enclosure with black color
	Installation	Floor Upstanding Type
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	10 %-90% (No-Condensing)
	Storage Temperature	-40 °C ~ 60 °C
	Storage Humidity	10% ~90%(No Condensing)
	Accessories	WIFI Antenna, Remote Controller, Power Cord.
Installation Wrench & necessary screws		

Specifications are subject to change without prior notice.

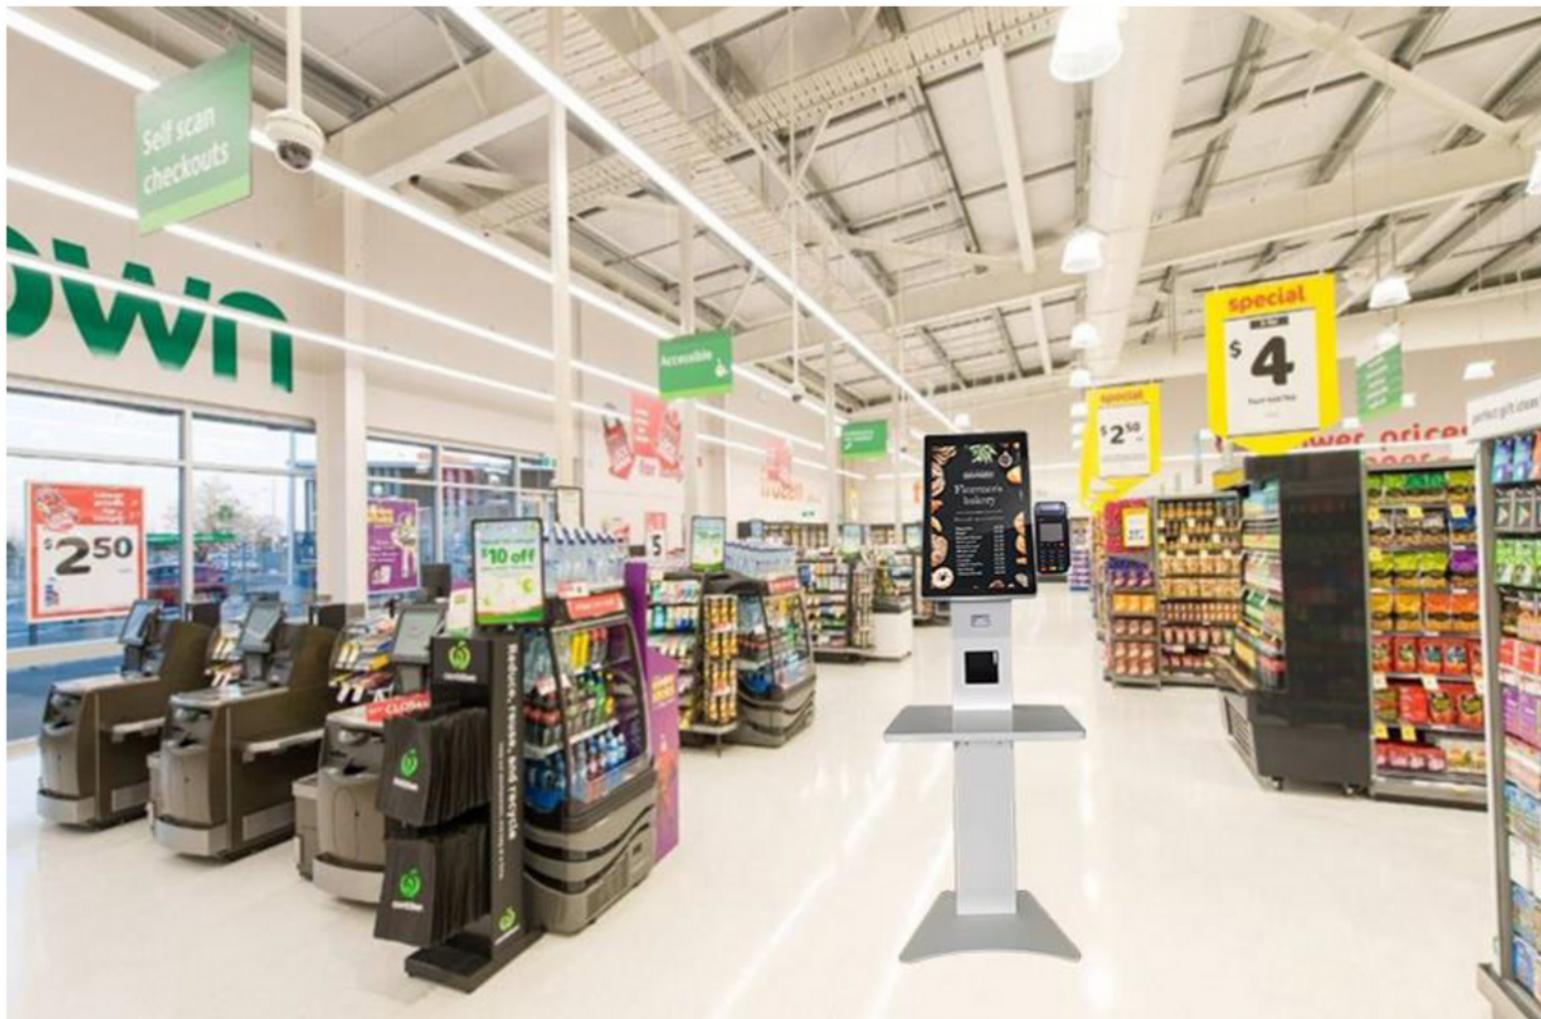

Vlastnosti:

- Full HD 21,5palcový displej s krytem z tvrzeného skla a hliníkové slitiny.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- Vícebodová kapacitní (PACP) dotyková obrazovka.
- Přední termální tiskárna s automatickým ořezáváním lístku.
- Čtečka čárového kódu / fotoaparát / snímač NFC / POS / možnost přidání držáku pro zboží.
- Montáž na stěnu / na podlahu.



Pokladní samoobslužný LCD kiosek

LCD Panel	Model	LW22DC
	Panel Brand	A Commercial Grade Panel
	Diagonal Size	22-inch
	Resolution	1920 X1080
	Brightness	350cd/m(Typical)
	Color Gamut	16.7M
	Display Area	699mm x 393mm
	View Angle	178° (H) /178° (V))
	Tempered Glass	4mm tempered glass
	Panel Lifespan	≥60000 hours
	Touch Frame	Multiple points capacitive PACP touch
Operating System(customization)	CPU	Intel Core I5-4300M,dual core 2.5 GHz
	Operating System	Windows system
	Graphics Card	Intel @ HD Graphics 4600
	Network	1* Realtek RTL8111H gigabit network card
	Storage	4G DDR4/128SSD
	Port Interface	1* VGA, 1* HDMI, 2* USB2.0, 3* USB3.0,1* Line out,1* MIC,1* 12V DC
Hardware(optional)	Internal Printer	Thermal printer (58mm or 80mm)
	Scanner	Barcode/QR Code Scanning
	Sensor	NFC Module
	Camera	2MP Full HD camera
Software	Application	Customer Provided
	System Language	Multiple Language Interface
General	Louder Speaker	8Ω 5W speaker
	Power Consumption	≤60W
	Power Supply	AC220V to 110V(50-60HZ)
	Outline Dimension	600(L) x 480(W) x 1516.1mm(H)
	Net Weight	58.7kg
	Housing	High-Grade Alloy mental housing , Aluminum Frame
	Frame Color	Black/ white, other color customized
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	5%-90%
	Storage Temperature	-40 °C ~ 60 °C
	Storage Humidity	90%(No humidity)
Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable	



Vlastnosti:



- Tvrzené sklo, pouzdro z vysoce kvalitní slitiny hliníku s lakováním pro automobily.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- IR / Kapacitní dotyková obrazovka.
- Přední termální tiskárna s automatickým ořezáváním lístku.
- Čtečka čárového kódu / fotoaparát / snímač NFC.



Samoobslužný LCD kiosek

LCD Panel	Model	LW19SD
	Diagonal Size	19-inch
	Resolution	1280 x 1024
	Brightness	350cd/m(Typical)
	Color Gamut	16.7M
	Display Area	374.784mm x 299.8mm
	View Angle	178° (H) /178° (V))
	Tempered Glass	High Transparency tempered glass
	Panel Lifespan	≥50000 hours
	Touch Frame	Multiple points IR touch
Operating System	CPU	Intel Core I5-4300M, dual core 2.5GHz
	Graphics Card	Intel HD Graphics 4600 core graphics card
	ROM	500 HDD
	RAM	4G DDR4
Component	USB Camera	Built-in Full HD 2MP Camera
	Metal Keyboard	Thin Industrial metal keyboard & trackpad
	Louder Speaker	2* 10 W louder speaker
	Microphone	1* microphone
Software	Application	Customer Provided
	System Language	Multiple Language Interface
General	Ethernet	1*RJ45 (10M/100M/1000M self-adaptive Ethernet)
	WIFI	802.1b/g/n /WIFI
	Port Interface	1* HDMI,1*VGA,2*USB2.0,2*USB3.0,1* Line out,1* Mic.
	Power Consumption	≤80 W
	Power Supply	AC220V to 110V(50-60HZ)
	Outline Dimension	1464.3 mm x 520mm x 470mm
	Housing	High-Grade Alloy mental housing with car grade painting, black + white color
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	5%-90%
	Storage Temperature	-40 °C ~ 60 °C
	Storage Humidity	90%(No humidity)
	Accessories	WIFI Antenna, screw, wrench, key,, power cable

Specifications are subject to change without prior notice.



Vlastnosti:


- Tvrzené sklo, pouzdro z vysoce kvalitní slitiny hliníku s lakováním pro automobily.
- Samostatná verze, Síťová verze (možnost Windows / Android OS).
- IR / Kapacitní dotyková obrazovka.
- Přední termální tiskárna s automatickým ořezáváním lístku.
- Možnost 2D a 3D scanneru čárového kódu / fotoaparátu / snímače NFC.



Samoobslužný LCD kiosek na jízdenky

LCD Panel	Model	LW19TD
	Diagonal Size	19-inch
	Resolution	1366 x 768
	Brightness	350cd/m(Typical)
	Color Gamut	16.7M
	Display Area	378mm x 301mm
	View Angle	178° (H) /178° (V))
	Tempered Glass	High Transparency tempered glass
	Panel Lifespan	≥50000 hours
	Touch Frame	Multiple points IR touch
Operating System	CPU	Intel Core I5-4300M, dual core 2.5GHz
	Graphics Card	Intel HD Graphics 4600 core graphics card
	ROM	256 SSD
	RAM	8G DDR4
Hardware	Internal Printer	Epson Thermal printer (80mm)
Software	Application	Customer Provided
	System Language	Multiple Language Interface
General	Ethernet	1*RJ45 (10M/100M/1000M self-adaptive Ethernet)
	WIFI	802.11b/g/n /WIFI
	Port Interface	1* HDMI,1*VGA,2*USB2.0,2*USB3.0,1* Line out,1* Mic.
	Louder Speaker	8Ω 5W speaker
	Power Consumption	≤120 W
	Power Supply	AC220V to 110V(50-60HZ)
	Outline Dimension	1437.2mm x 520mm x 367.8mm
	Housing	High-Grade Alloy mental housing with car grade painting, Customized Color
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	5%-90%
	Storage Temperature	-40 °C ~ 60 °C
	Storage Humidity	90%(No humidity)
Accessories	WIFI Antenna, screw, wrench, key,, power cable	

Specifications are subject to change without prior notice.



- IP65 Vodotěsnost a odolnost proti prachu.



- 14 hodinová doba výdrže baterie.



- Operační systém Android.



- Vzdálená aktualizace.



- Jas 1500 NIT.



- Vandal-odolné tvrzené sklo.



- Bezpečnostní zámek.



- Ultrafialové záření-odolnost proti UV záření.




- Nabídka nastavení seznamu přehrávání.



- Vložit USB a jednoduše přehrát obsah.

Více směrné pohyblivé otáčení

Flexibilní skládací konstrukce se speciálními nožními kolečky je vhodná pro ovládání jednou osobou.

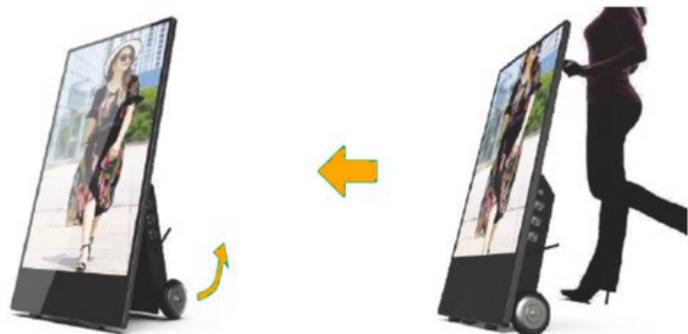


Pevné provedení páky zámku

Přijměte pokročilou konstrukci zámkové páky, která zajišťuje stabilní umístění digitálního posteru, což umožňuje přenášení a stabilní postavení.







Outdoor LCD Poster s baterií

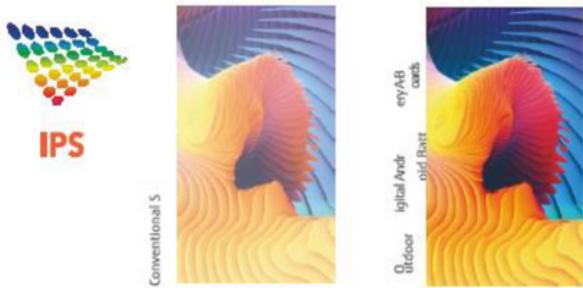

Outdoor LCD Poster s baterií

LCD Panel	Model	LW43SK-B
	Diagonal Size	43-inch
	LCD Panel	Commercial A Grade wide temperature LCD Panel (105°C)
	Resolution	1920 x 1080
	Display Ratio	9 : 16
	Display Active Area	529.2 mm(V) x 940.9mm(H)
	Brightness	1500cd/m ² (auto brightness calibration)
	Contrast Ratio	4000:1
	Display Colors	16.7 M
	View Angle	178° (H) /178° (V))
	Response Time	≤ 6ms
	Working Hour	7x 24 hours
	Panel Life	≥50000 hours
	Tempered Glass	Vandal proof high transparent tempered glass
Lithium Battery	Battery Technology	Lithium Battery
	Duration Time	14 hours (STD brightness)
	Charging Time	7 hours per time
	Battery Capacity	43200m AH
	Power Voltage	25.2V
	Power Consumption	110 W
Operation System	Chipset	T972 chipset, quad core A55 processor, main frequency 1.9GHZ
	Android Version	Android 9.0
	ROM	16G EMMC
	RAM	2G DDR3
Connectivity	HDMI	1 x HDMI input
	USB	2 x USB 2.0
	RJ45	1X RJ45
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker
Network	Ethernet	10M/100MEthernet
	WIFI	802.11 b/g/n
	Bluetooth	Yes
Digital Signage Software	Video Format	Wmv/avi/flv/rm/rmbv/mpeg /ts/mp4, etc.
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format
	Image Format	BMP/JPEG/PNG/GIF, etc.,
	File Format	PPT/Word/Excel/PDF
	Flash	Support
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play
		Scroll caption, weather time control, support live streaming, third party integration
Remote Management Software	Cloud/local digital signage software	
Other	Power Supply Voltage	AC240V to 110V (50 HZ/ 60HZ)
	Outline Dimension	1199.8 mm (H) x 599.8 mm(W) x 41.5mm(D)
	Enclosure	Industrial aluminum alloy black enclosure Waterproof, Dustproof, Anti-sunshine, Anti-corrosion, Ultraviolet Resistance, Anti- theft, Anti-Moisture
	Protection Grade	IP65
	Installation	Stand with Wheels & foldable design
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	10 %-90% (No-Condensing)
	Storage Temperature	-20 °C ~ 60 °C
	Storage Humidity	10% ~90%(No Condensing)
	Accessories	WIFI Antenna, Remote Controller, Power Cord.
		Installation Wrench & necessary screws

Outdoor LCD Poster s baterií

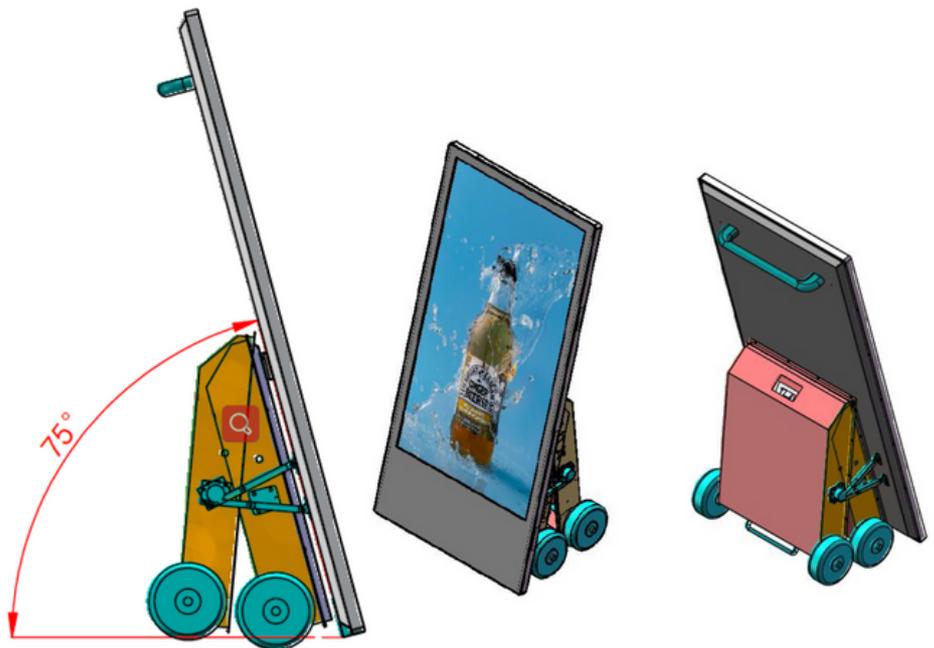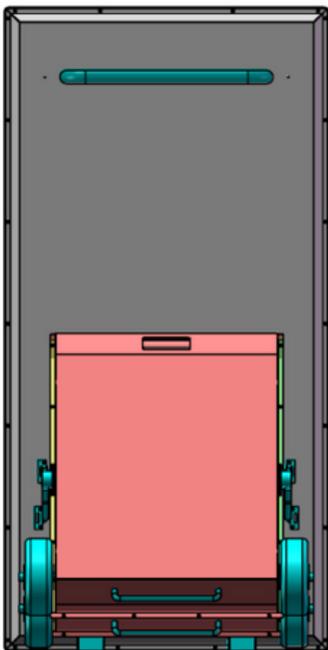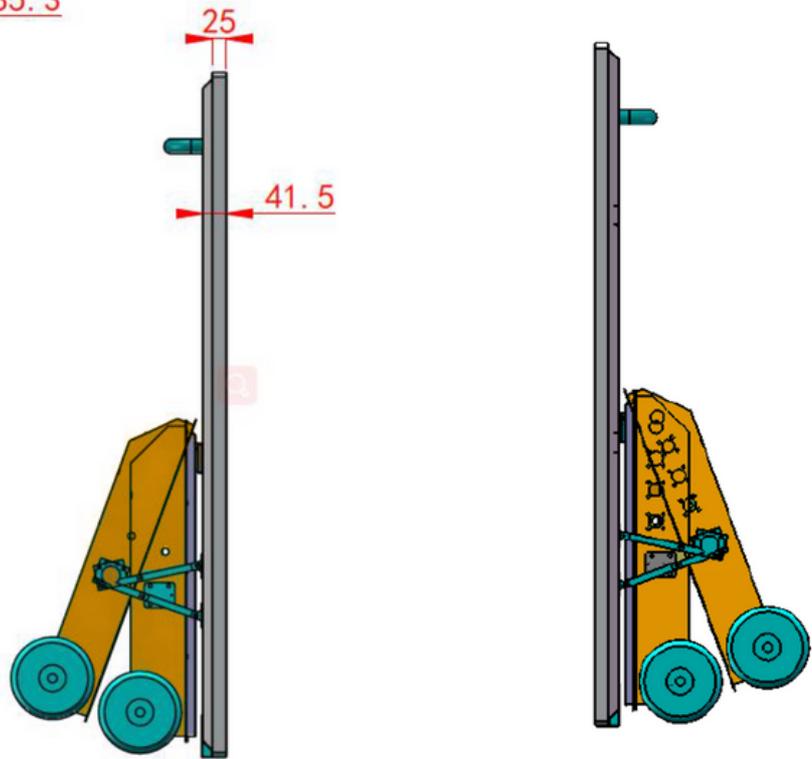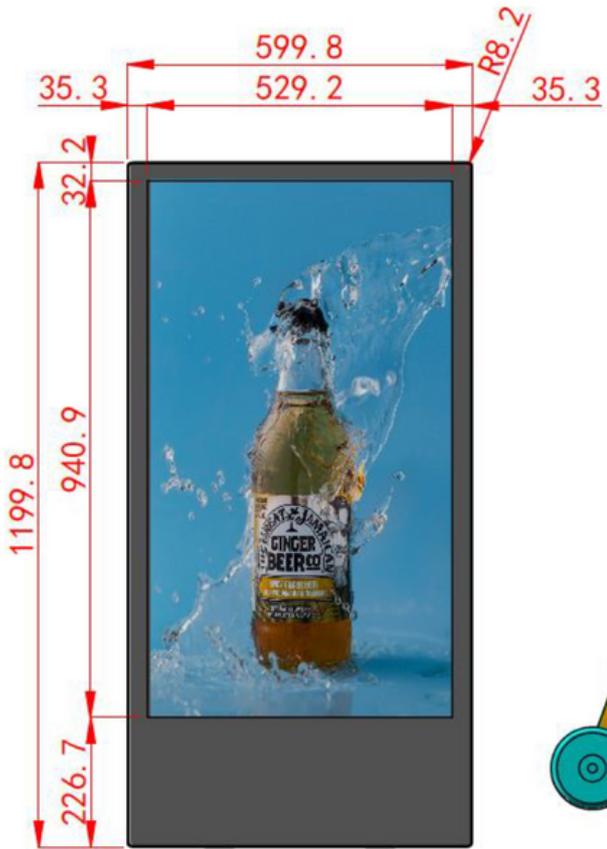



Vlastnosti:



- 4K/Full HD displej s 3mm tvrzeným sklem.
- Volné otáčení o 360° s horizontálním a vertikálním režimem obrazovky.
- Samostatná verze, Síťová verze (možnost Windows / Android)
- Možnost vertikální/horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.



Otočný interaktivní LCD stojan


LCD Panel	Model	LW32DS	LW43DS	LW49DS	LW55DS	LW65DS
	Dimension	32"	43"	49"	55"	65"
	Brightness	350 cd/m ² (Typical)				
	Brand	BOE/CSOT/LG				
	Color Gamut	16.7M				
	View Angle	178° (H) /178° (V)				
	Tempered Glass	tempered glass protection				
	Double Screen	Double LCD Screen Design				
	Display Content	Sync/ Unsync display content				
	Touch Screen	Multiple Capacitive /IR Touch Points				
	Panel Life	≥50000 hours				
Operation System (Option)	System	Windows/Android option				
Digital Signage Software(option)	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.				
	Audio Format	MP3/WAV all audio format				
	Image Format	BMP/JPEG/PNG				
	Language	Multiple countries language interface				
	Multiple Play Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play				
	Remote Management	Cloud Digital Signage Software				
General	Network Interface	RJ45/IEEE802.31/100M ETHERNET LAN/WIFI				
	Port Interface	HDMI*1/USB*2/USIM Card Slot/TF card Slot				
	Audio	Left channel, right channel, 8Ω 5W speaker				
	Power Supply	AC220V to 110V(50-60HZ)				
	Housing	High-Grade Alloy mental housing , Aluminum Frame, Customized Color				
	Frame Color	Black/ white, other color customized				
	Working Temperature	-20 °C ~ 50 °C				
	Working Humidity	5%-90%				
	Storage Temperature	-40 °C ~ 60 °C				
	Storage Humidity	90%(No humidity)				
	Accessories	WIFI Antenna, screw, wrench, key, remote controller, power cable				



Vlastnosti:



- 4K/Full HD displej a 1,5mm hliníkový kryt z vysoce kvalitní slitiny.
- Samostatná verze, Síťová verze (možnost Windows / Android)
- Možnost vertikální/horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.
- Možnost Kapacitní / IR dotykové obrazovky.

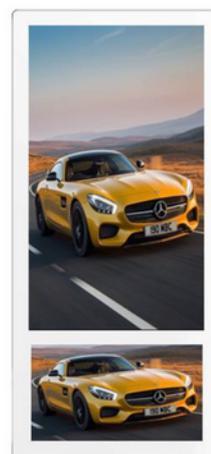

Výťahová LCD obrazovka

LCD Panel	Diagonal Size	18.5inch+10.1inch	19.5inch+11.6inch	21.5inch+19.1inch	23.6inch+12.5inch
	Panel Brand	LG/CSOT/BOE/Innolux			
	Upside Resolution	1366*768	1920*1080	1920*1080	1080*1920
	Downside Resolution	1280*800	1920*1080	1920*360	1920*1080
	View Angle	85°/85°/80°/80°			
	Tempered Glass	Yes			
	Panel Life	≥60000 hours			
System	Android CPU	RK3288			
	Storage	2G RAM,16GROM			
Function	Video Format	video: All video formats Image: JPG, GIF, BMP Music: MP3			
	Remote Management	Yes			
	Play Mode	Vertical/horizontal /full screen/split mode			
	Backend Software	Yes			
General	Brightness Adjustment	Auto			
	Power Supply	AC220V to 12V			
	Housing	1.5mm High-Grade Alloy mental housing , Aluminum Frame			
	Working Temperature	-20 °C ~ 50 °C			
	Working Humidity	5%-90%			
	Storage Temperature	-40 °C ~ 60 °C			
	Storage Humidity	90%			
	Customization is available				



Vlastnosti:

- 2K displej s tvrzeným sklem, kovovým krytem z průmyslové slitiny a uměleckým dřevěným rámem.
- Vestavěná základní deska Android Media s operačním systémem Android.
- Možnost vertikální/horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.



Umělecký dřevěný rám s LCD obrazovkou

	Diagonal Size	22inch	24inch	27inch	32inch	43inch	49inch	55inch	
LCD Panel	LCD Panel	Commercial A Grade LCD Panel							
	Resolution	1920 x 1080							
	Display Ratio	16:9/ 9:16							
	Display Active Area	789.4 mm x483.85mm							
	Brightness	350 cd/m ² (typical)							
	Contrast Ratio	1300:1							
	Display Colors	16.7 bit							
	View Angle	178° (H) /178° (V))							
	Response Time	≤ 6ms							
	Tempered Glass	Tempered high transparency glass protection							
	Working Hour	7x 24 hours							
	Panel Life	≥50000 hours							
	Built-in Android Media Board	System Version	Android 7.1 Version						
		Chipset	A40 quad ARM Cortex-A7,main frequency 1.8GHz & GPU Mail-T764						
ROM		16G EMMC							
RAM		1G DDR3							
Connectivity	HDMI	1 x HDMI 1.4							
	USB	2 x USB 2.0							
	RJ45	1X RJ45							
	Built-in Louder Speaker	2 x 8Ω 5W louder speaker							
Network	Ethernet	10M/100MEthernet							
	WIFI	802.11 b/g/n							
	Bluetooth	Yes							
Digital Signage Software	Video Format	Wmv/avi/ffv/rm/rmvb/mpeg /ts/mp4,etc.							
	Audio Format	MP3/WAV/WMA/APE/FLA/AAC/OGG/AC3 all audio format							
	Image Format	BMP/JPEG/PNG/GIF,etc,							
	File Format	PPT/Word/Excel/PDF							
	Flash	Support							
	Smart Function	Support horizontal, vertical, full screen and split screen, playback, timing switch play							
		Scroll caption, weather time control, support live streaming, third party integration							
	Remote Management Software	Cloud/local digital signage software							
	Power Supply Voltage	AC240V to 110V (50 HZ/ 60HZ)							
	Enclosure	Industrial Metal steel enclosure with artistic wooden frame							
	Installation	Wall mount/ floor upstanding installation							
	Working Temperature	-20 °C ~ 50 °C							
	Working Humidity	10 %-90% (No-Condensing)							
	Storage Temperature	-40 °C ~ 60 °C							
	Storage Humidity	10% ~90%(No Condensing)							
	Accessories	WIFI Antenna, Remote Controller, Power Cord.							
Installation Wrench & necessary screws									



Vlastnosti:



- Operační systém Android s připojením WIFI.
- Průmyslový tenký kovový kryt.
- Možnost vertikální/horizontální instalace.
- Režim inteligentního zobrazení rozdělené obrazovky
- Přehrajte si více reklamních materiálů (obrázek, datum, video, čas, počasí, fotografie atd.)
- Interval Play Reklama podle nastavení.
- Vzdálená aktualizace a správa backendové platformy.



LCD policové lišty

LCD Panel	Diagonal Size	19.5 inch	24inch	28.6inch	35.4inch	36.8inch	43inch	49.5inch	58.4inch
	Backlight	WLED							
	Resolution	1920 x 360	1920 x 540	1920 x 540	1920 x 360	1920x360	1920x360	1920x540	1920x540
	View Angle	178° (H) /178° (V))							
	Brightness	500cd/m ²							
	Contrast Ratio	3000:1							
	Response Time	6ms							
	Panel Life	≥30000 hours							
Operation System	CPU	RK PX30							
	Android Version	Android 8.1							
	ROM	8G							
	RAM	1GB DDR3							
Digital Signage Software Function	Video Format	Wmv/avi/flv/rm/rmvb/mpeg /ts/mp4,etc.							
	Image Format	BMP/JPEG/PNG/GIF							
	Language	English Language Interface							
	Multiple Display Mode	Support horizontal, vertical, full screen and split screen, playback, timing switch play							
	Remote Management Software	Digital signage software							
General	WIFI	Support WIFI 802.11b/g/n							
	Port Interface	1* USB2.0 (Micro USB port)							
	Power Consumption	≤ 0.5 W							
	Power Supply Voltage	DC 12V 2A							
	Outline Dimension	521.5 x179.5x47.6	642x156x46.8	748 x245.5x45.8	924x204x50	958x210.5x52	1112x239x52	1248x378x52	1465x437.5x58
	Working Temperature	-20 °C ~ 50 °C							
	Working Humidity	5%-90%							
	Storage Temperature	-40 °C ~ 60 °C							
	Storage Humidity	10~90%(No humidity)							
	Accessories	remote controller, power cable, power adapter							

Dotykový LCD stůl

LCD Panel	Diagonal Size	43-inch	49-inch	55-inch	65-inch
	Resolution	1920*1080			
	Display Ratio	16:9			
	Brightness	450cd/m			
	Contrast Ratio	4000:1			
	View Angle	178° (H) /178° (V)			
	Panel Life	≥60000 hours			
Android System Option	System Architecture	1.8GHz frequency, quad-core Cortec-A17 RK3288, RK3299(Optional)			
	RAM	2GB			
	ROM	8GB			
	Interface	HDMI*1,RJ45*1,USB*2,SD *1, MIC-IN*1,DC*1			
Windows System Option	Processor	Intel J1900/I3/I5/I7 option			
	Storage	3GB/4GB/8GB			
	HDD	64GB/128G/500G/1T			
	WIFI	802.11 b/g/n			
	Network Card	1* Gigabit card			
	Interface	HDMI*1,VGA*1,RJ45*1,USB*4, LINE-OUT*1,MIC-IN*1			
Touch Screen	Touch Frame	Capacitive touch			
	Type	Glass+Glass			
	Touch Panel	Tempered 7 Grade Anti-Explosion 4mm Glass			
	Touch Points	10 points			
	Response Time	≤5ms			
	Touch Accuracy	≥6mm			
	Touch Lifetime	60 Million Times			
Other	Power Supply	100V ~240V 50Hz~60Hz			
	Working Temperature	°C ~ 50 °C			
	Working Humidity	5%-90%			
	Storage Temperature	-20 °C ~ 60 °C			
	Storage Humidity	90%(No humidity)			

Specifications are subject to change without prior notice.